

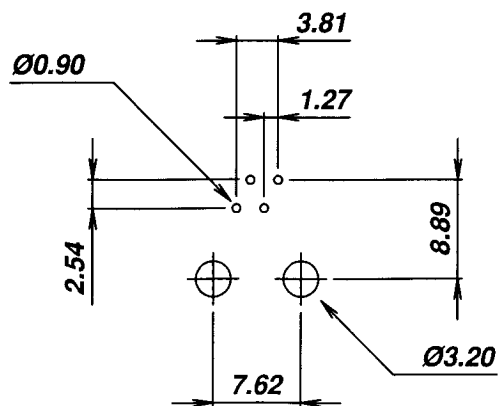
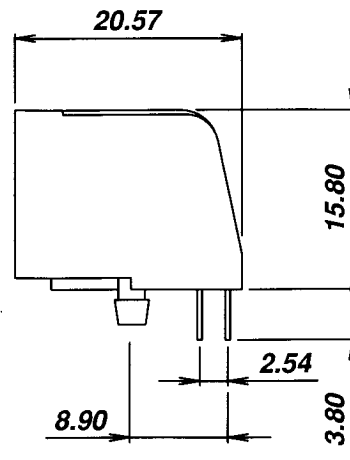


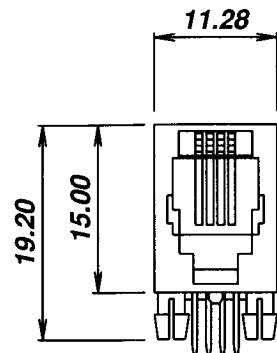

PCB LAYOUT

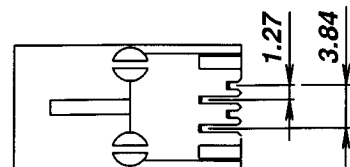

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC
 Dielectric Voltage : 1,000 RMS 60 Sec. Min.

2. Physical Char.

Housing : PBT Glass Filled (UL 94V-0)
 Color : Black Color
 Spring Wire : 0.35mm Thickness Phosphor Bronze
 Gold Plating Over Nickel
 Temperature Range : - 25 +90 C
 Durability : 500 Mating cycles Min.

AJ-006-4-A-X-N

A=4p4c

Gold
plated

1=15u , 3=50u
2=30u , 4= 6 u

DWG. NO.
AS006002

DO NOT SECALE DRAWING	TOLERANCES UNLESS OTHERWISE NOTED	INCH	MM	DR.	DATA
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00 ± 0.01 000 ± 0.005 0000 ± 0.002	00 ± 0.25 000 ± 0.13 0000 ± 0.05	CK'D Johnn	JUL-30 '04
MM INCH	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D Billy	JUL-30 '04

TITLE

RJ11 SIDE ENTRY PCB JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-006-4-A-X-N

SCALE SIZE DWG. NO. 9601 SERIES