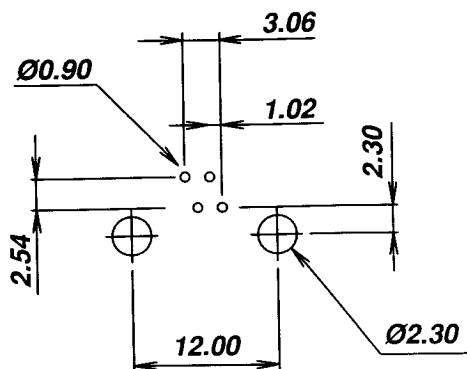
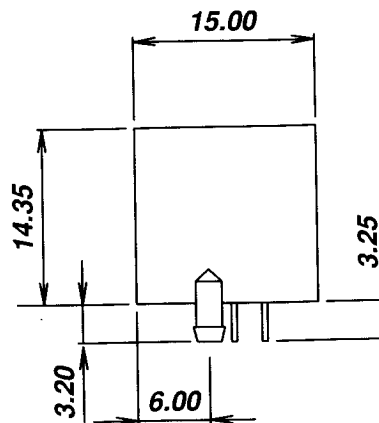



PCB LAYOUT
(Top View)

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC
Dielectric Voltage : 1,000 RMS 60 Sec. Min.

2. Physical Char.

Housing : PBTGlass Filled (UL 94V-0)
Color : Black/Medium Gray Color
Spring Wire : 0.45mm Dia. Phosphor Bronze
Gold Plating Over Nickel
Temperature Range : - 25 +90 C
Durability : 500 Mating cycles Min.

AJ-011-4-A-X

A=4p4c

Gold
plated

1=15u , 3=50u
2=30u , 4= 6 u

DWG. NO.
AS011001

DO NOT SECALE DRAWING	TOLERANCES UNLESS OTHERWISE NOTED	INCH	MM	DR.	DATA
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	CK'D Johnn	JUL-30 '04
$\frac{MM}{INCH}$	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D Billy	JUL-30 '04

TITLE
LOW PORFILE FLANGE PCB JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-011-4-A-X

SCALE SIZE DWG. NO. 9613 SERIES