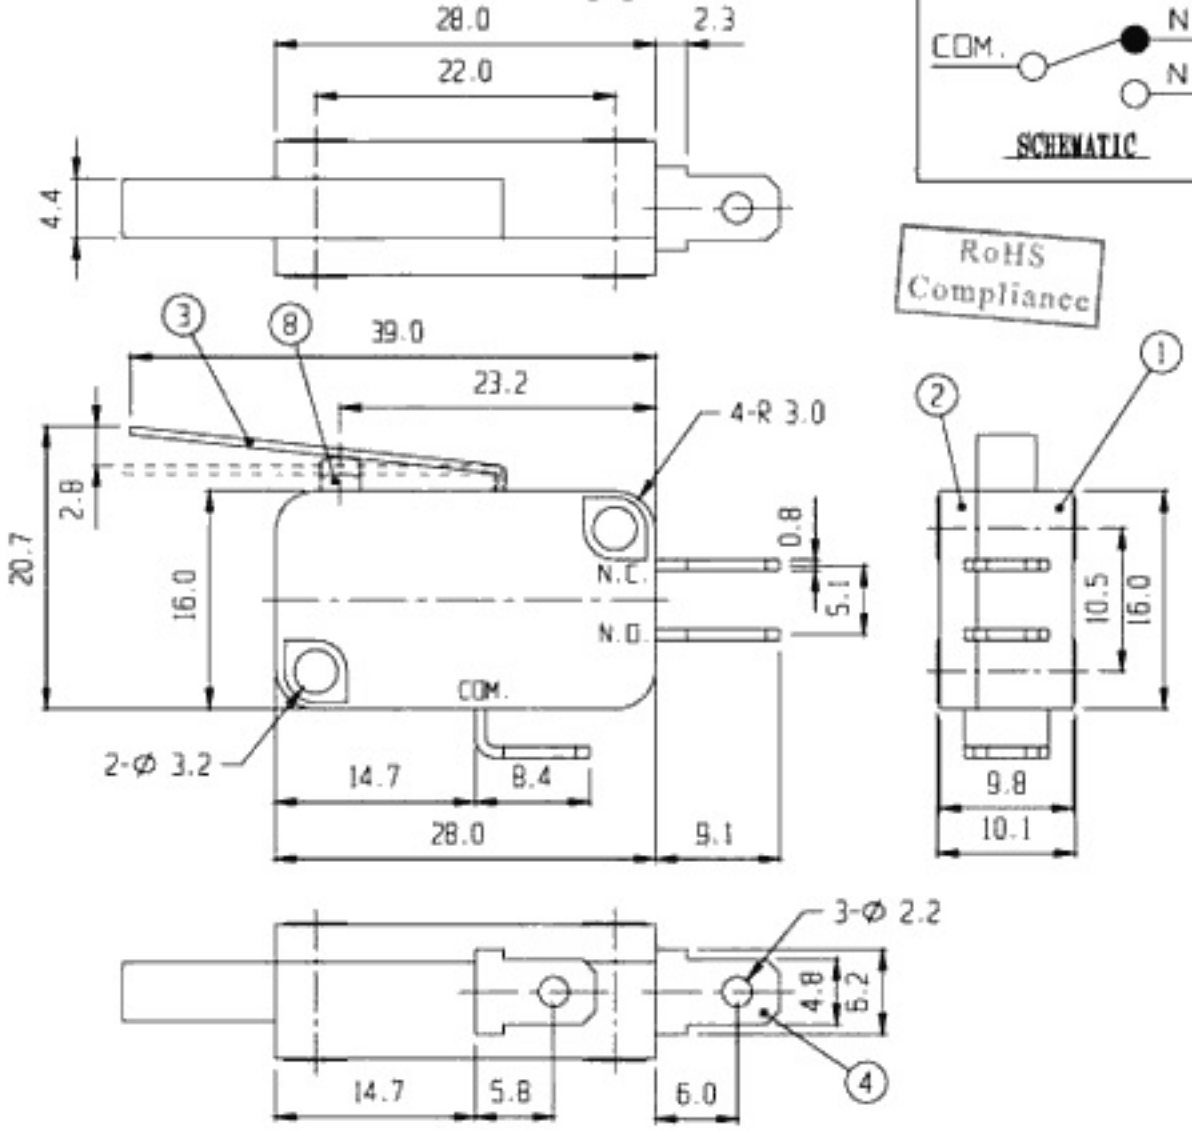

NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS
7	SPRING	STEEL WIRE	1		8	PUSH BUTTON	P C	1	
5	CONTACT	BRASS	1		6	CONTACT POINT	Ag	1	
3	KNOB	SPCC	1		4	TERMINAL	BRASS	3	Ag PLATED
1	FRAME	P F	1		2	COVER	A B S	1	

ISSUED	SPECIFICATION	TITLE: MICRO SWITCH (18)			
	RATING: AC 125V 1A CONTACT RESISTANCE: 30mΩ max.	MODEL NO: MS-1010			
	INSULATION RESISTANCE: 100MΩ AT 500V DC	TOLERANCE	UNIT: MM	DWN.	
	WITHSTAND VOLTAGE: AC 250V for 1 minute	UP TO 1.0:±0.1	SCALE: 3:1	CHK'D.	
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 01		
	SWITCHING LIFE: 100K cycles min.	OVER 10.0:±0.3	DRWG NO:	APPD.	