



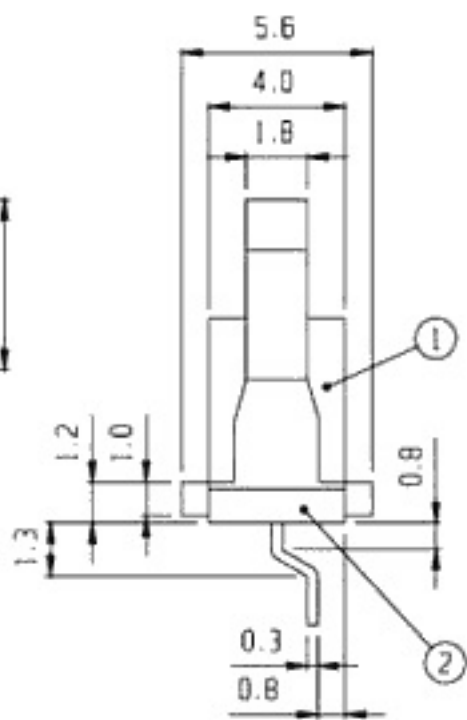

RoHS  
Compliance

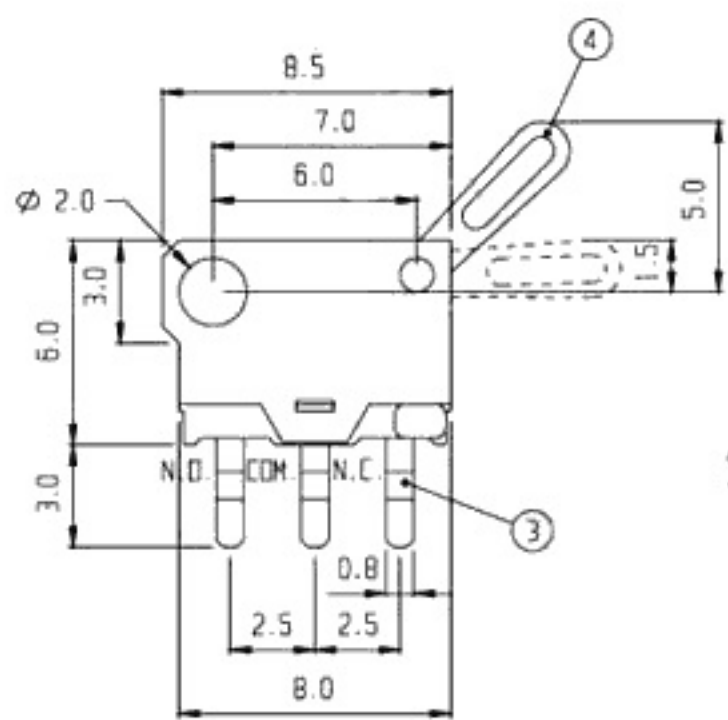

5	CONTACT	P B S	1	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	3	Ag PLATED	4	KNOB	P O M	1	
1	FRAME	A B S	1		2	FRAME	A B S	1	
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED SPECIFICATION TITLE: MICRO SWITCH (01A)

RATING: DC 30V 0.1A MODEL NO: MS-109A

CONTACT RESISTANCE: Not more than 30mΩ (initial)	TOLERANCE	UNIT: MM	DWN.	<i>hws</i>
INSULATION RESISTANCE: 100MΩ AT 250V DC	UP TO 1.0:±0.1	SCALE: 5:1	CHK'D.	<i>m</i>
WITHSTAND VOLTAGE: AC 250V for 1 minute	1.0 TO 10.0:±0.2	VERSION: 1	APPD.	<i>[Signature]</i>
OPERATION FORCE: REFER ATTACH SPECIFICATION	OVER 10.0:±0.3	DRWG NO:		
SWITCHING LIFE: 20K cycles (15-20c/m unloading)				

