


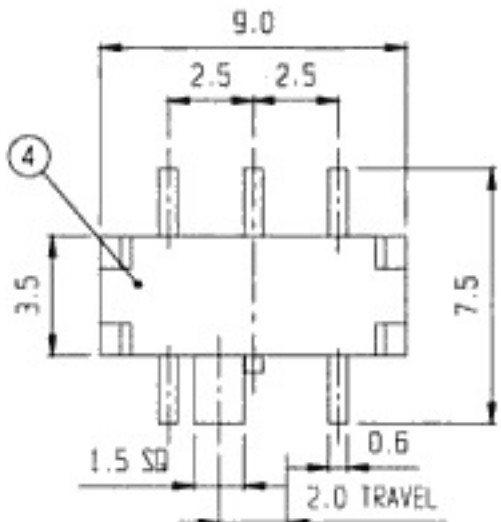


SCHEMATIC

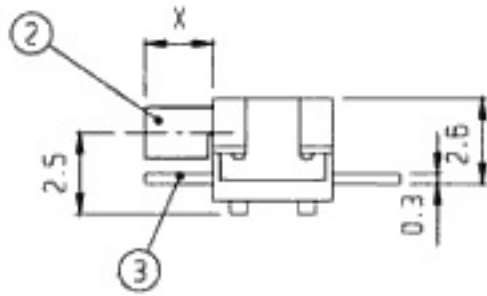

P.C.B. LAYOUT

RoHS Compliance

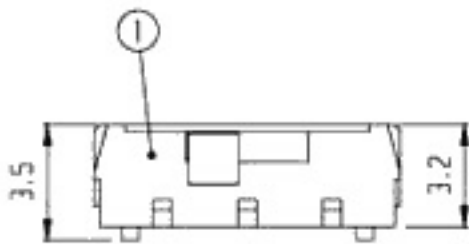

| NO. | PART | MATERIAL | QTY | REMARKS | NO. | PART | MATERIAL | QTY | REMARKS |
|-----|----------|----------|-----|-----------|-----|-------------|----------|-----|---------|
| 5 | CONTACT | P B S | 1 | Ag PLATED | | | | | |
| 3 | TERMINAL | BRASS | 5 | Ag PLATED | 4 | COVER BOARD | S U S | 1 | |
| 1 | FRAME | NYLON | 1 | | 2 | KNOB | NYLON | 1 | TG 2-5 |

ISSUED

SPECIFICATION

TITLE: MINIATURE SIDE KNOB SLIDE SWITCH (1P2T)



RATING: DC 12V 0.1A
 CONTACT RESISTANCE: 70mΩ max.
 INSULATION RESISTANCE: 100MΩ AT 500V DC
 WITHSTAND VOLTAGE: AC 100V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: MSK-12D35

| TOLERANCE | UNIT: MM | DWN. |
|------------------|-------------|--------|
| UP TO 1.0:±0.1 | SCALE: 5:1 | CHK'D. |
| 1.0 TO 10.0:±0.2 | VERSION: 02 | APPD. |
| OVER 10.0:±0.3 | DRWG NO: | |