



RoHS Compliance

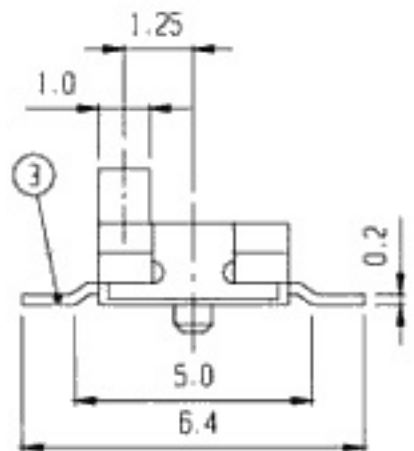

5	CONTACT	CuBe	2	Ag PLATED	6	SPRING PLATE	S U S	1	
3	TERMINAL	BRASS	8	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	TG 1-5
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED                      SPECIFICATION                      TITLE: MINIATURE SLIDE SWITCH (2P3T)

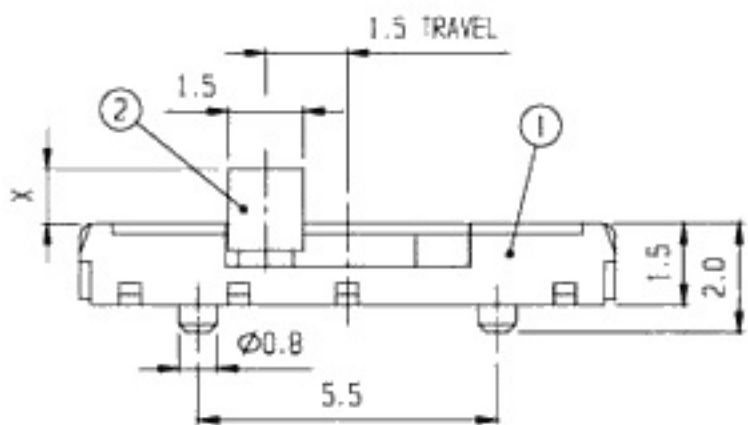

RATING: DC 12V 0.1A  
 CONTACT RESISTANCE: 70mΩ max.  
 INSULATION RESISTANCE: 100MΩ AT 500V DC  
 WITHSTAND VOLTAGE: AC 100V for 1 minute  
 OPERATION FORCE: REFER ATTACH SPECIFICATION  
 SWITCHING LIFE: 10K cycles min.

MODEL NO: MSS-23C02

TOLERANCE	UNIT: MM	DWN.	
UP TO 1.0:±0.1	SCALE: 8:1	CHK'D.	
1.0 TO 10.0:±0.2	VERSION: 04	APPD.	
OVER 10.0:±0.3	DRWG NO:		