




Non-shorting





SCHMATIC



PCB LAYOUT

RoHS Compliance

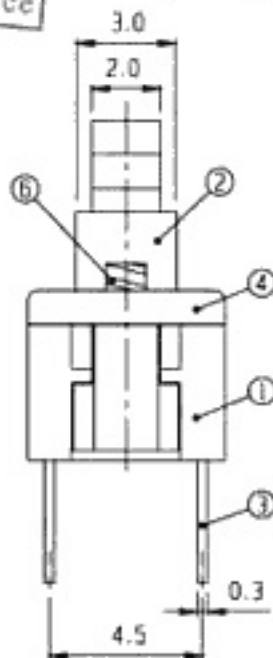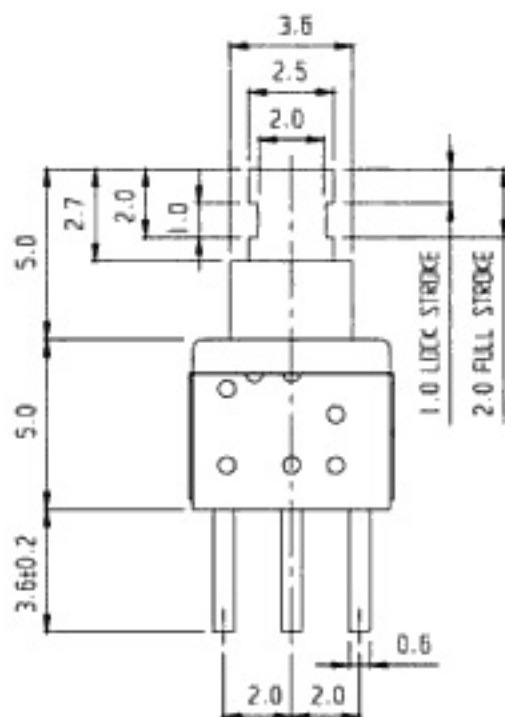

7	HOOK	S U S	1						
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	6	Ag PLATED	4	COVER	P O M	1	
1	FRAME	NYLON	1	HGY	2	KNOB	P O M	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: PUSH SLIDE SWITCH (2P2T)
(LOCK)

RATING: DC 30V 0.1A
 CONTACT RESISTANCE: 70mΩ max.
 INSULATION RESISTANCE: 100MΩ at 500V DC
 WITHSTAND VOLTAGE: AC 250V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: PS-22D05L
 TOLERANCE: UP TO 1.0:±0.1
 1.0 TO 10.0:±0.2
 OVER 10.0:±0.3
 UNIT: MM
 SCALE: 5:1
 VERSION: 04
 DRWG NO:



DWN. *[Signature]*
 CHK'D. *[Signature]*
 APPD. *[Signature]*