



Non-shorting
shorting





SCHMATIC

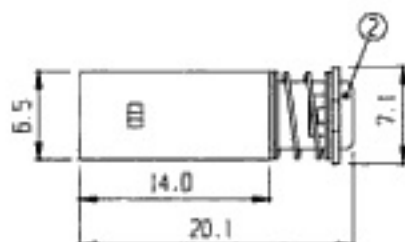

PCB LAYOUT

RoHS
Compliance

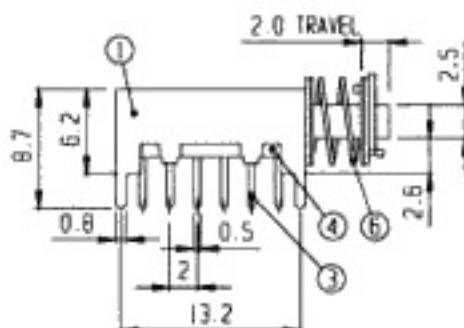

| | | | | | | | | |
|----|-----------|----------|-----|-----------|----|---------------|--------------|-------------|
| 7 | "E" PLATE | S P C C | 1 | Ni PLATED | | | | |
| 5 | CONTACT | P B S | 4 | Ag PLATED | 6 | SPRING | STREL WIRE | 1 |
| 3 | TERMINAL | BRASS | 12 | Ag PLATED | 4 | TERMINAL BASE | PHENOL RESIN | 1 NATURAL |
| 1 | FRAME | S P C C | 1 | Ni PLATED | 2 | KNOB | P O M | 1 |
| NO | PART | MATERIAL | QTY | REMARKS | NO | PART | MATERIAL | QTY REMARKS |

ISSUED

SPECIFICATION

TITLE:

PUSH SLIDE SWITCH(4P2T)
(UNLOCK)

RATING: DC 30V 0.3A

CONTACT RESISTANCE: 30mΩ max.

INSULATION RESISTANCE: 500MΩ at 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 10K cycles min.

MODEL NO:

PS-42D01

TOLERANCE

UNIT: MM

DWN.

UP TO 1.0:±0.1

SCALE: 2:1

CHK'D.

1.0 TO 10.0:±0.2

VERSION: 1

OVER 10.0:±0.3

DRWG NO:

APPD.

