



Non shorting





SCHEMATIC



PCB LAYOUT

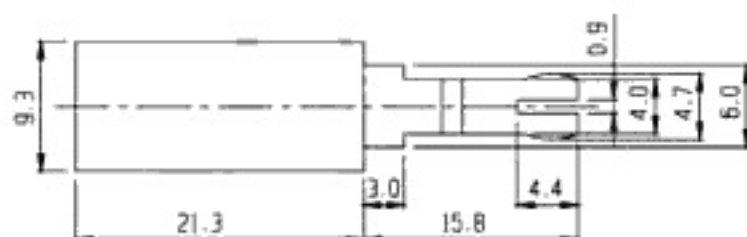

RoHS Compliance

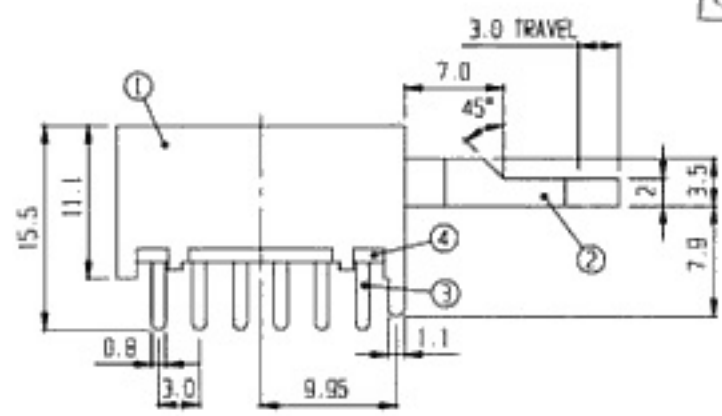

5	CONTACT	P B S	4	Ag PLATED	6	SPRING	STKEL WIRE	1	
3	TERMINAL	BRASS	12	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O W	1	G 15.8
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED SPECIFICATION TITLE: PUSH SLIDE SWITCH (4P2T) (UNLOCK)

RATING: DC 30V 0.3A MODEL NO: PS-42F07

	CONTACT RESISTANCE: 30mΩ max.	TOLERANCE	UNIT: MM	DWN.	<i>hw</i>
	INSULATION RESISTANCE: 500MΩ at 500V DC	UP TO 1.0:±0.1	SCALE: 2:1	CHK'D.	<i>hw</i>
	WITHSTAND VOLTAGE: AC 500V for 1 minute	1.0 TO 10.0:±0.2	VERSION: 01	APPD.	<i>hw</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION	OVER 10.0:±0.3	DRWG NO:		
SWITCHING LIFE: 10K cycles min.					