




BREAKER

➔ RFLB Serie

Rating: 3~30A 125V/250V AC
 Approvals: UL/cUL

Rating: 3~30A 125V/250V AC /50VDC
 Approvals: TÜV

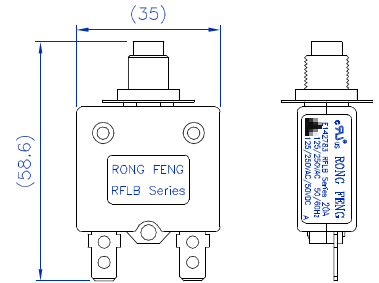

Panel Hole	M11X1.0	M12X1.0		
Bushing Type	Metal		Plastic	
	A Type	B Type	D Type	C Type

Mounting Cap	Metal		Plastic		Silica gel	Nameplate Type	Embossed (ALUMINUM)	Silver Printing On Black
	1 Type	2 Type	3 Type	4 Type	5 Type			

Terminal Type						
	.250 Tab A Type: Straight	.250 Tab B Type: Line Pin	.250 Tab C Type: Load Pin	.250 Tab D Type: 90° Bend	.250 Tab E Type: 90° Bend Backward	.250 Tab F Type:

