




Non-shorting shorting


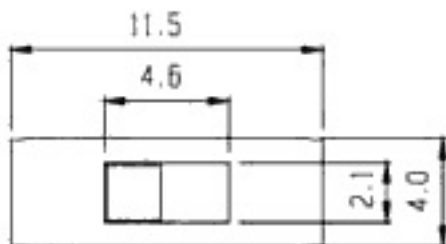


SCHEMATIC



PCB LAYOUT

RoHS Compliance

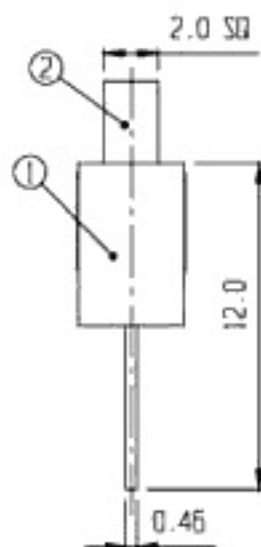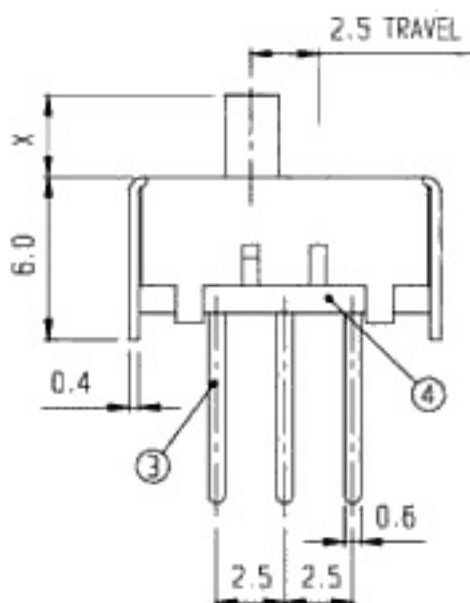

5	CONTACT	P B S	1	Ag PLATED
3	TERMINAL	BRASS	3	Ag PLATED
1	FRAME	SPCC	1	BLACK PLATED
NO	PART	MATERIAL	QTY	REMARKS

4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
2	KNOB	P O M	1	TG 2-6
NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE:	SLIDE SWITCH (1P2T)	
---------------	----------------------	---------------	---------------------	--

	RATING: DC 30V 0.3A	MODEL NO: SS-12E17 (TG)		
	CONTACT RESISTANCE: 30mΩ max.	TOLERANCE	UNIT: MM	DWN. <i>hms</i>
	INSULATION RESISTANCE: 500MΩ at 500V DC	UP TO 1.0:±0.1	SCALE: 4:1	CHK'D. <i>hm</i>
	WITHSTAND VOLTAGE: AC 500V for 1 minute	1.0 TO 10.0:±0.2	VERSION: 01	APPD. <i>[Signature]</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION	OVER 10.0:±0.3	DRWG NO:	

SWITCHING LIFE: 10K cycles min.				
--	--	--	--	--