




**SCHEMATIC**

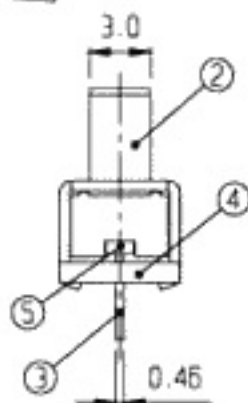

**PCB LAYOUT**

RoHS Compliance

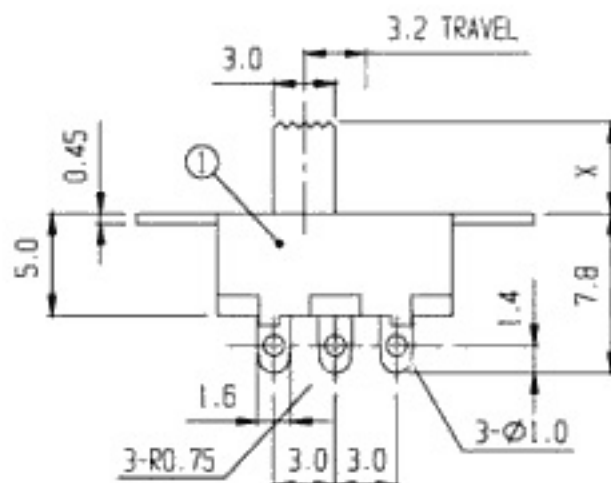

5	CONTACT	BRASS	1	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	3	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	SPCC	1	BLACK PLATED	2	KNOB	P O M	1	EG 2-15
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: SLIDE SWITCH (1P2T)

RATING: DC 30V 0.3A  
 CONTACT RESISTANCE: 30mΩ max.  
 INSULATION RESISTANCE: 500MΩ at 500V DC  
 WITHSTAND VOLTAGE: AC 500V for 1 minute  
 OPERATION FORCE: REFER ATTACH SPECIFICATION  
 SWITCHING LIFE: 10K cycles min.

MODEL NO: SS-12F65( EG )

TOLERANCE: UP TO 1.0:±0.1  
 1.0 TO 10.0:±0.2  
 OVR 10.0:±0.3  
 UNIT: MM  
 SCALE: 2.5:1  
 VERSION: 01  
 DRWG NO:

DWN.  
 CHK'D.  
 APPD.

