





Non-shorting

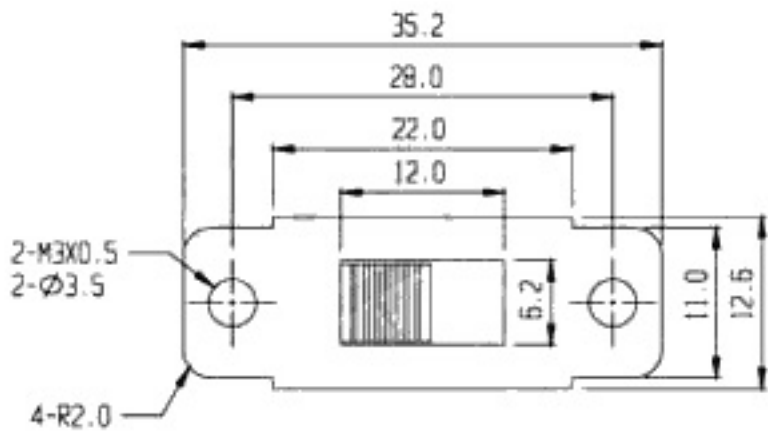


SCHMATIC

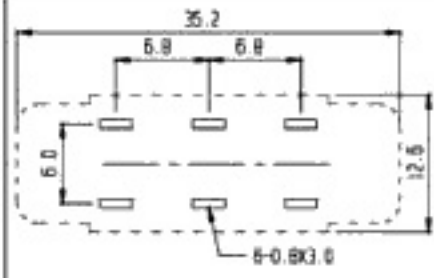

PCB LAYOUT

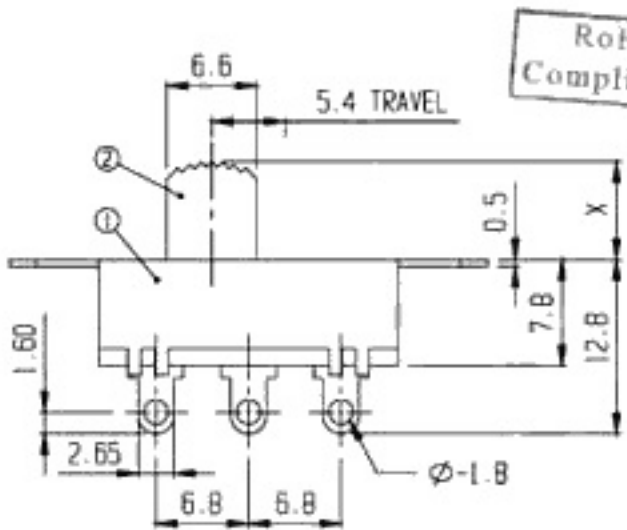

RoHS Compliance

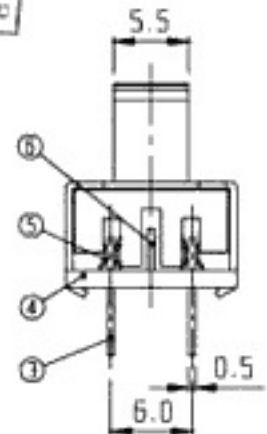

7	BALL	STEEL	1		8	SPRING	STEEL WIRE	1	
5	CONTACT	P B S	2	Ag PLATED	6	CENTER PLATE	S P C C	1	Ni PLATED
3	TERMINAL	BRASS	6	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P C	1	G 3.2-10
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: SLIDE SWITCH (2P2T)



RATING: AC 250V 0.3A AC 125V 1A DC 50V 0.5A
 CONTACT RESISTANCE: 30mΩ max.
 INSULATION RESISTANCE: 500MΩ at 500V DC
 WITHSTAND VOLTAGE: AC 500V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: SS-22L19 (G)

TOLERANCE	UNIT: MM	DWN.	<i>hw</i>
UP TO 1.0:±0.1	SCALE: 2:1	CHK'D.	<i>hw</i>
1.0 TO 10.0:±0.2	VERSION: 01	APPD.	<i>hw</i>
OVER 10.0:±0.3	DRWG NO:		