




SCHEMATIC



PCB LAYOUT

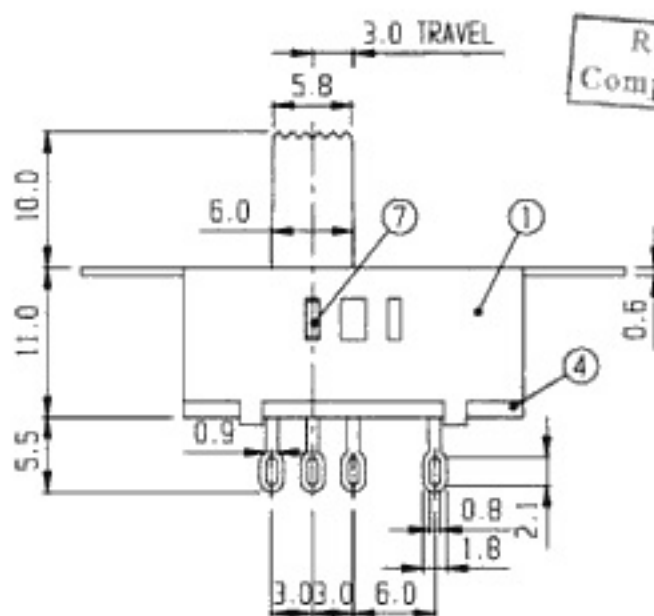

RoHS Compliance

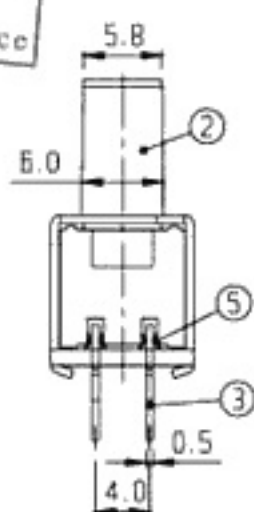

7	BALL	STEEL	1						
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	8	Au PLATED	4	TERMINAL BASE	PHENOL RESIN	1 NATURAL	
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	A B S	1 EG 10	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED SPECIFICATION TITLE: SLIDE SWITCH (2P3T)

RATING: DC 30V 0.5A
 CONTACT RESISTANCE: 30mΩ max.
 MODEL NO: SS-23F39(EG)

INSULATION RESISTANCE: 500MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN.	<i>hro</i>
WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE: 2:1	CHK'D.	<i>hro</i>
OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 02	APPD.	<i>hro</i>
SWITCHING LIFE: 10K cycles min.	OVER 10.0:±0.3	DRWG NO:		

