


SS30 Sealed Sub-miniature Slide Switches



PENDING

SPECIFICATIONS

CONTACT RATING: 0.4 VA max. @20V AC or DC max.
 ELECTRICAL LIFE: 40,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 50 mΩ max. initial @2-4 VDC, 100 mA
 INSULATION RESISTANCE: 1,000 MΩ min.
 DIELECTRIC STRENGTH: 500 V RMS @ sea level.
 OPERATING TEMPERATURE: -30°C to +85°C

MATERIALS


CASE - PBT (UL 94V-0)
 HOUSING - Nickel plated brass
 TERMINAL - Phosphor bronze, tin plated over nickel barrier
 CONTACT - Phosphor bronze, gold plated over nickel barrier
 SWITCH SUPPORT - Nickel plated brass

How do you build the switches you need!!

SS - 4 - C K -



Switch Function		Termination	Contact Material	RoHS code
SS-4	SP on-none-on	C P.C	K (std) gold / tin plated	☐ = none
SS-4A	SP on-off-on	H horizon	R gold plated	H = RoHS Compliant
SS-5	DP on-none-on	V vertical		
SS-5A	DP on-off-on			

Model No.	Switching position		
SS-4	ON	none	ON
SS-4A	ON	OFF	ON
Term. Comm.	2-3	open	2-1

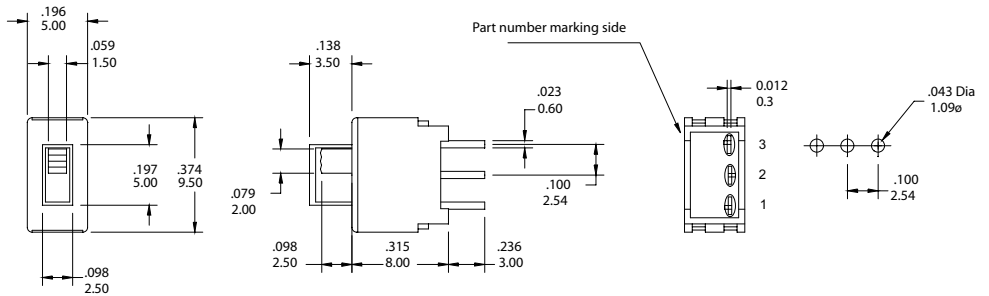

SS-4-CK

Model No.	Switching position		
SS-5	ON	none	ON
SS-5A	ON	OFF	ON
Term. Comm.	2-3,5-6	open	2-1,5-4

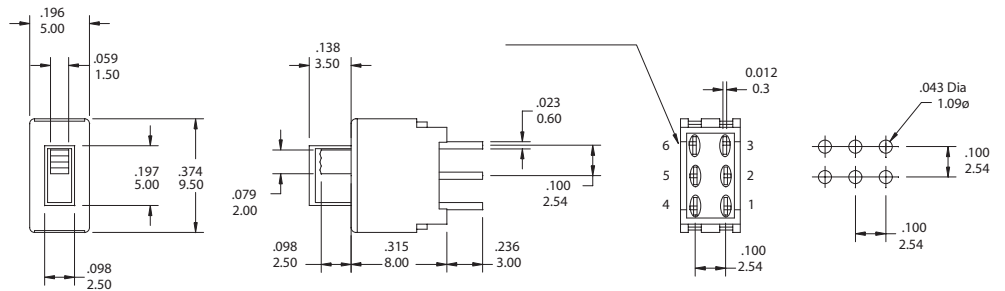

SS-5-CK

CONTACT MATERIAL OPTIONS

CODE	CONTACT MATERIAL	TERMINAL MATERIAL	RATING
K	Brass, gold plated	Copper alloy, tin plated	0.4VA MAX @ 20 VAC or VDC
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA MAX @ 20 V AC or DC MAX