





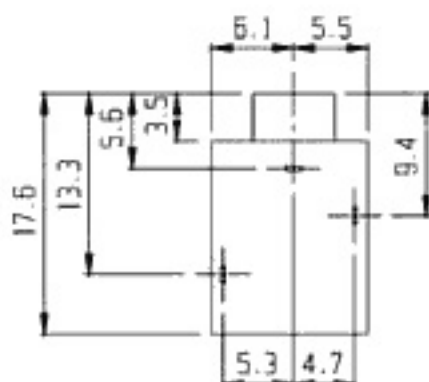

SCHEMATIC

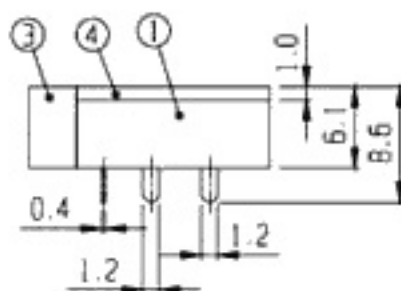

PCB LAYOUT



RoHS
Compliance

| 3 | SHEATH | BRASS | 1 | Ni PLATED | 4 | COVER BOARD | P C | 1 | |
|-----|--------|----------|-----|-----------|-----|-------------|----------|-----|-----------|
| 1 | FRAME | A B S | 1 | | 2 | TERMINAL | BRASS | 3 | Ag PLATED |
| NO. | PART | MATERIAL | QTY | REMARKS | NO. | PART | MATERIAL | QTY | REMARKS |

ISSUED

SPECIFICATION

TITLE: 3.5mm STEREO JACK



RATING: DC 30V 0.3A
 CONTACT RESISTANCE: 50mΩ max.
 INSULATION RESISTANCE: 100MΩ AT 500V DC
 WITHSTAND VOLTAGE: AC 500V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 5k cycles (15-18 cycles/min unloading)

MODEL NO: ST-3508

| | | | |
|------------------|------------|--------|-----|
| TOLERANCE | UNIT: MM | DWN. | hoo |
| UP TO 1.0:±0.1 | SCALE: 2:1 | CHK'D. | hoo |
| 1.0 TO 10.0:±0.2 | VERSION: 2 | APPD. | hoo |
| OVER 10.0:±0.3 | DRWG NO: | | |