


RoHS
Compliance

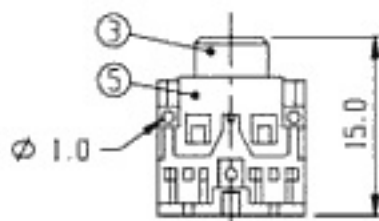

5	TERMINAL	BRASS	1	Ag PLATED	6	TERMINAL	BRASS	2	Ag PLATED
3	SHEATH	BRASS	1	Ni PLATED	4	CONTACT	PBS-SH	2	Ag PLATED
1	FRAME	P B T	1		2	FRAME	P B T	1	
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: 3.5mm STEREO JACK

RATING: DC 30V 0.3A

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 100MΩ AT 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 5M cycles (15-18 cycles/min unloading)

MODEL NO: ST-3556

TOLERANCE UNIT: MM

UP TO 1.0:±0.1 SCALE: 1.5:1

1.0 TO 10.0:±0.2 VERSION: 1

OVER 10.0:±0.3 DRWG NO:

DWN.

CHK'D.

APPD.

