







SCHEMATIC



PCB LAYOUT

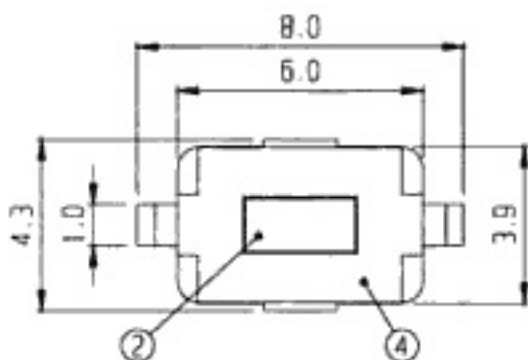

RoHS  
Compliance

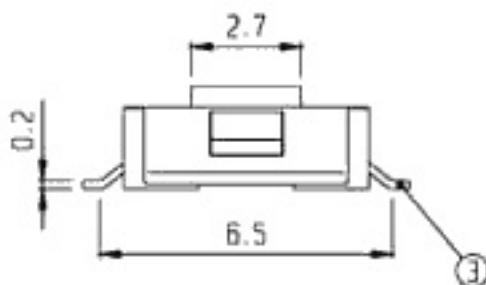

5	CONTACT	S U S	1						
3	TERMINAL	BRASS	2	Ag PLATED	4	COVER	S U S	1	
1	FRAME	NYLON	1		2	KNOB	NYLON	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH (01A)



RATING: DC 12V 50mA  
 CONTACT RESISTANCE: 100mΩ Max.  
 INSULATION RESISTANCE: 100MΩ at 500V DC  
 WITHSTAND VOLTAGE: AC 250V for 1 minute.  
 OPERATION FORCE: REFER ATTACH SPECIFICATION  
 SWITCHING LIFE: 50k Cycles Min.

MODEL NO: TC-06308-00

TOLERANCE	UNIT: MM	DWN.	<i>hoo</i>
UP TO 1.0:±0.1	SCALE: 6:1	CHK'D.	<i>m</i>
1.0 TO 10.0:±0.2	VERSION: 01	APPD.	<i>[Signature]</i>
OVER 10.0:±0.3	DRWG NO:		