


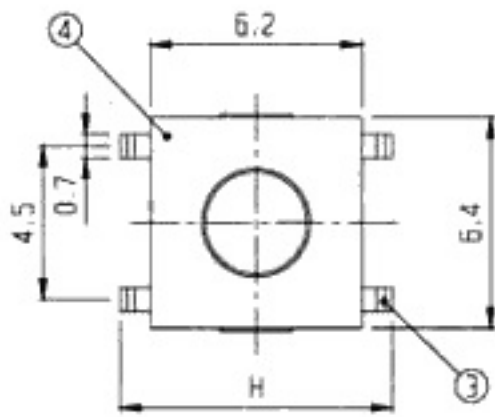


SCHEMATIC



PCB LAYOUT

RoHS
Compliance

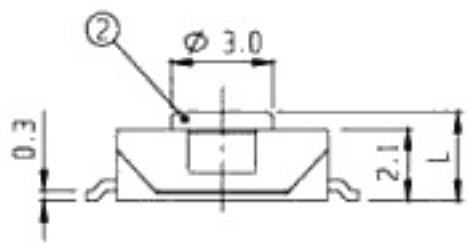

TC-12020-00	8.00	2.50	TC-12020-01	10.0	2.50				
TC-12020A-00	8.00	3.10	TC-12020A-01	10.0	3.10	WITH GROUND COVER	WITHOUT GROUND COVER	WITH EMBOSSED CASE	WITHOUT EMBOSSED CASE
MODEL NO.	H	L	MODEL NO.	H	L	P	D	E	N
5	CONTACT	P B S	1	Ag PLATED					
3	TERMINAL	BRASS	4	Ag PLATED	4	COVER	S U S	1	
1	FRAME	NYLON	1		2	KNOB	NYLON	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH (01A)



RATING: DC 12V 50mA
 CONTACT RESISTANCE: 100mΩ Max.
 INSULATION RESISTANCE: 100MΩ at 500V DC
 WITHSTAND VOLTAGE: AC 250V for 1 minute.
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 50k Cycles Min.

MODEL NO: TC-12020()-00-D-N

TOLERANCE	UNIT: MM	DWN.	hso
UP TO 1.0:±0.1	SCALE: 5:1	CHK'D.	mm
1.0 TO 10.0:±0.2	VERSION: 01	APPD.	
OVER 10.0:±0.3	DRWG NO:		