





SCHEMATIC



PCB LAYOUT

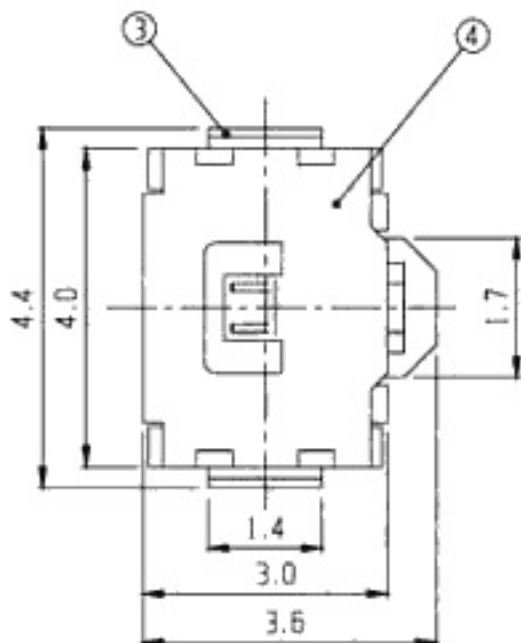

RoHS
Compliance

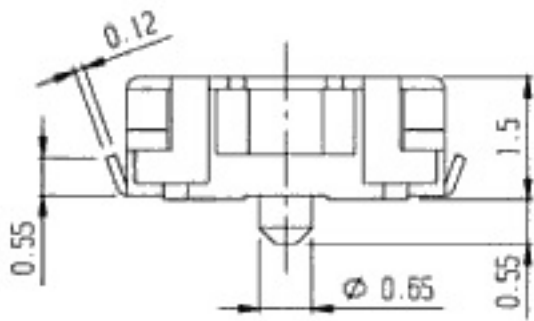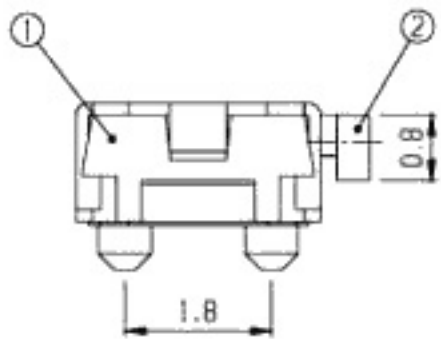

5	CONTACT	S U S	2		6	DUST COVER	POLYIMIDE	1	
3	TERMINAL	BRASS	2	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH



RATING: DC 12V 50mA
CONTACT RESISTANCE: 100mΩ Max.
INSULATION RESISTANCE: 100MΩ at 500V DC
WITHSTAND VOLTAGE: AC 250V for 1 minute.
OPERATION FORCE: REFER ATTACH SPECIFICATION
SWITCHING LIFE: 100k cycles Min.

MODEL NO: TC-26404-00

TOLERANCE	UNIT: MM	DWN.	<i>hoo</i>
UP TO 1.0:±0.1	SCALE: 12:1	CHK'D.	<i>mm</i>
1.0 TO 10.0:±0.2	VERSION: 1	APPD.	<i>[Signature]</i>
OVER 10.0:±0.3	DRWG NO:		