



NOTES:
***Material**
 Body: Liquid Crystal Polstal (L.C.P.) UL(94V-0).
 Contact: Copper Alloy.
 Contact Plated: Gold Over Nickel or Tin Plating.
 Ejector: Liquid Crystal Polstal (L.C.P.) UL (94V-0).

***Specification**
 Contact Current Rating: 1 AMP.
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min. Initial.
 Operating Temperature: -55°C to +105°C.
 Dielectric Withstanding Voltage: 1.0 KVAC.
 Capacitance: 1pf Max.
 Durability: 25 Cycle Min.
 Contact Engaging Force: 150 G Max. Per Contact, Initial.
 Contact Separating Force: 40 G Min. Per Contact, Initial.

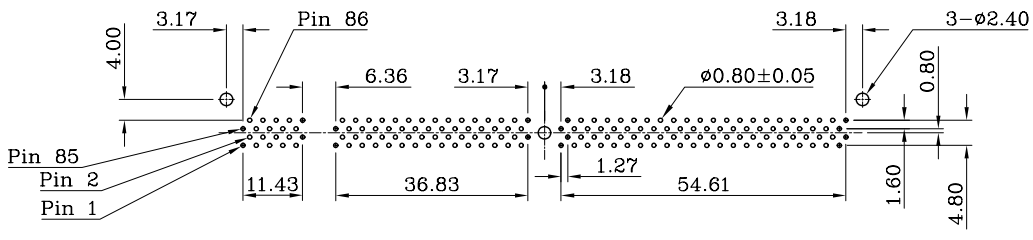

P.C.B. Layout

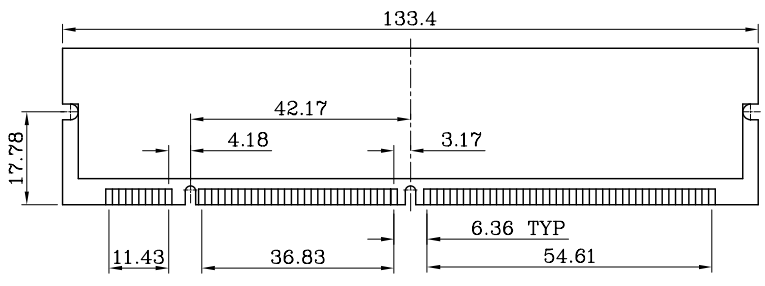

Non-Standard DRAM 3.3 Volt

***How to Order**
 W2DD-2-168 B A 6 D L 1 1 U
 U:Lead Free Blank:Sn-Pb
 1:Metal Posts
 1:Black 3:White
 L:LCP
 D:DRAM
 6:Reverse Position
 Gold A:Flash B:5u" D:15u" F:30u"
 B:3.3V
 NO. of Contacts
 2:Low Profile 25"
 Loose Piece Pin
 Series NO.

REV	Add Lead Free	Units		mm	Scale	Drawing By	Data					
Tolerance Unless Otherwise Specified						Reviewed By	Data	Date	Sheet	1 of 1	Title	DIMM 168-25D (1.6Pitch) (Reverse Type)
.X ~ ±0.38						Approval By	Data	Third Angle Projection				
.XX ~ ±0.25								Drawing No.		REV		
.XXX ~ ±0.20												
Angle ~ ± 3°												