

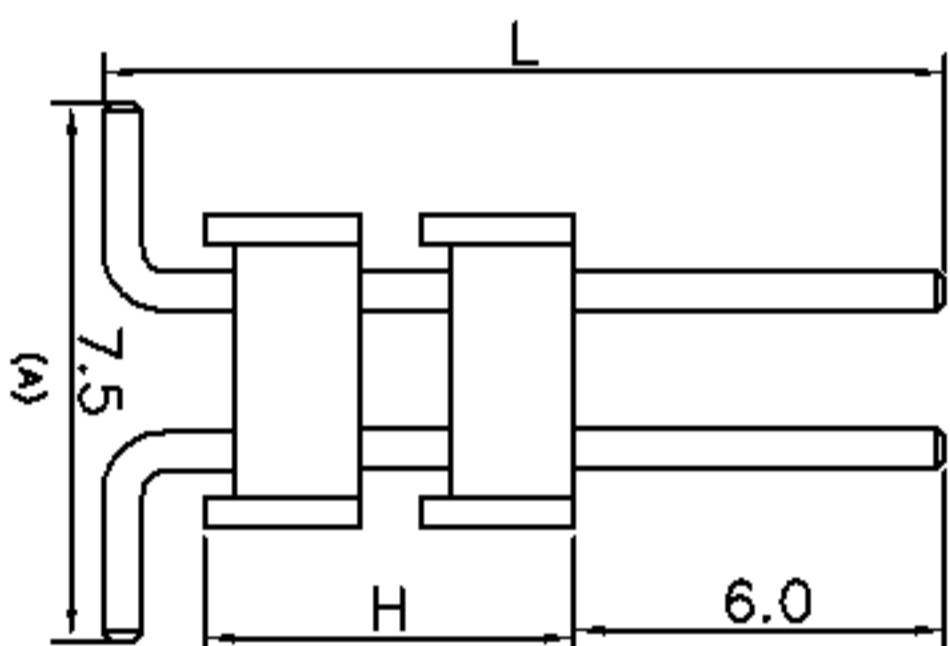
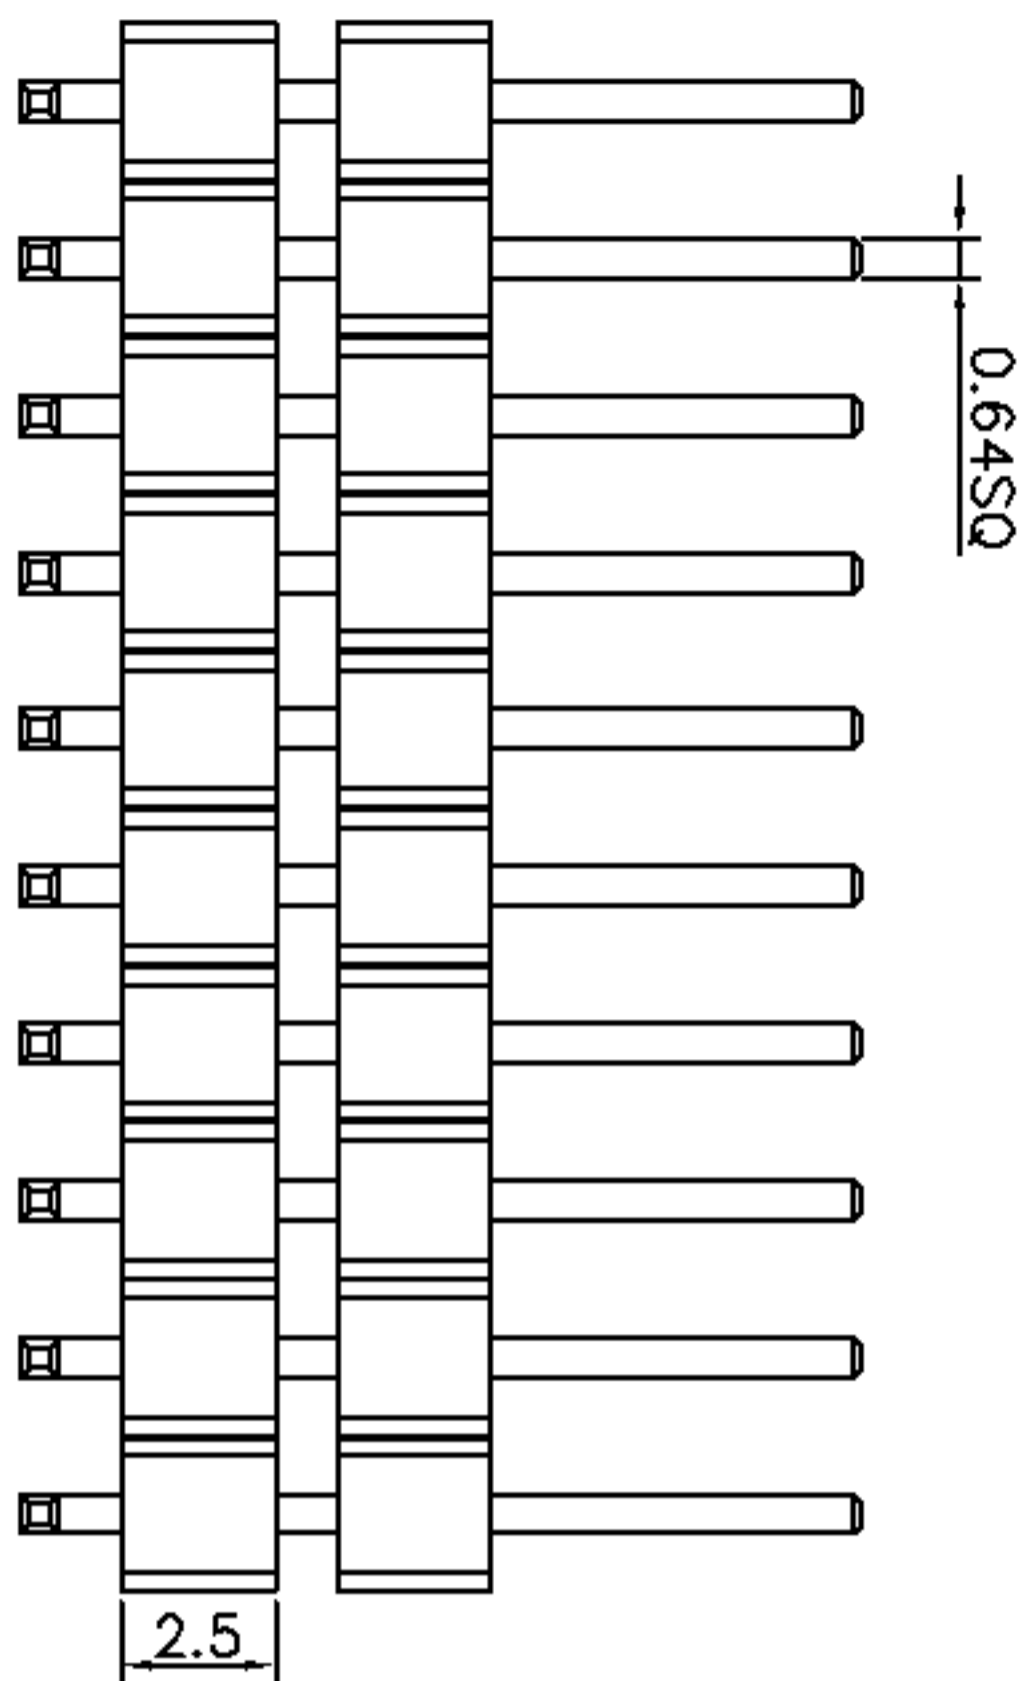


A			
	新版图	/	2012.05.23

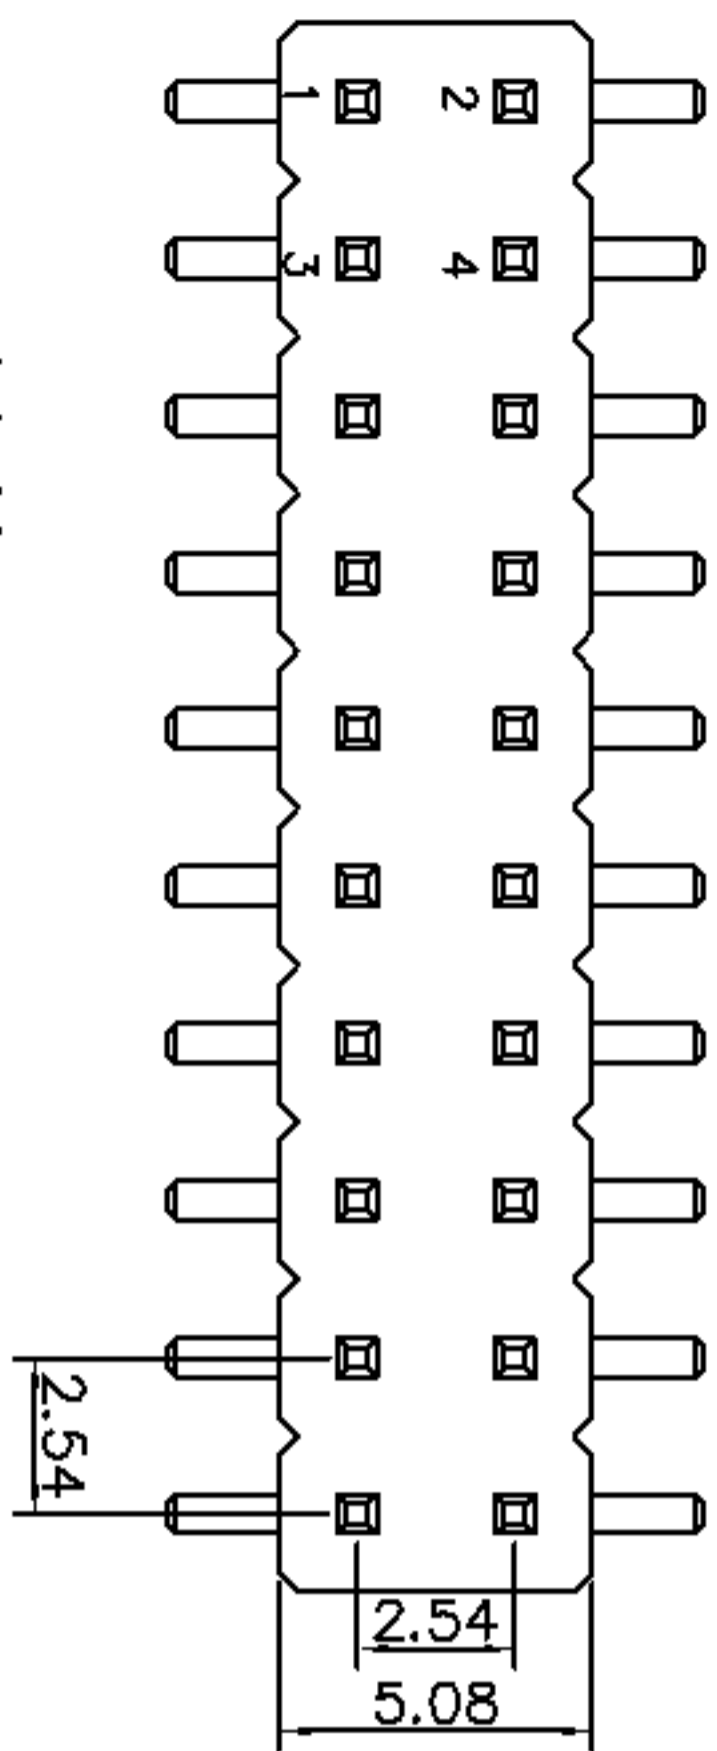

H、L、A的尺寸  
可依客户要求订做

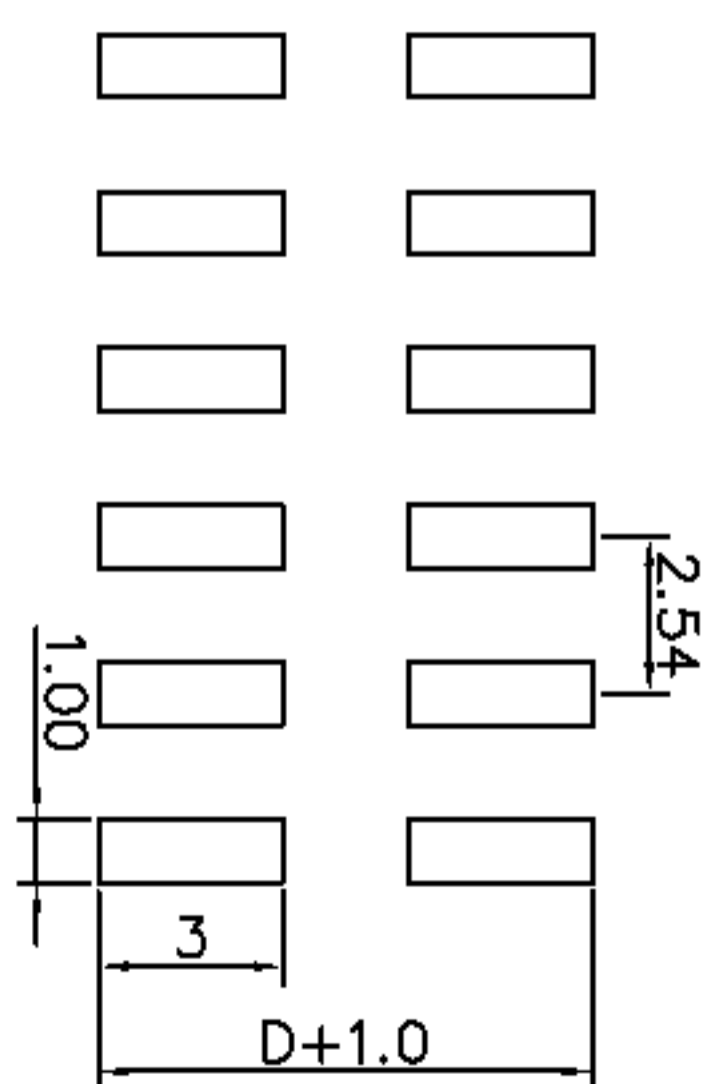

PCB Layout

Technical Data:

Material:  
Contact Material:Brass  
Insulator Material:PBT+30%GF  
Electrical:  
Current rating:3Amps/Contact max.  
Contact resistance:<=20mohms/Contact  
Insulation resistance:>=1000Mohms at V=100V  
Withstanding Voltage:550V AC/Minute  
Mechanical:  
Operating Temperature:Gold plated :-55° C~105° C  
Tin plated :-40° C~105° C  
Soldering Temperature:260° C 10s Max.

1101-254M22XX-H-L  
2.54PIN距双塑胶双  
排SMT排针系列  
每排PIN数  
塑高  
总高

DRAWN		DATE		 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD
YSH		2012.05.23		
CHECKED		DATE		TITLE:
CLIENT APPROVED		DATE		排针系列-2.54 PIN距-双排-双塑胶 贴片型排针
RFQ NO				UNIT :
CLIENT P/N				SCALE: free
FILE NO. : YH20120525A009				

TOLERANCE		ANGLE
TOL		
ON	0.05	
.XXX =	0.15	1°
XX =	0.20	2°
X =	0.30	