
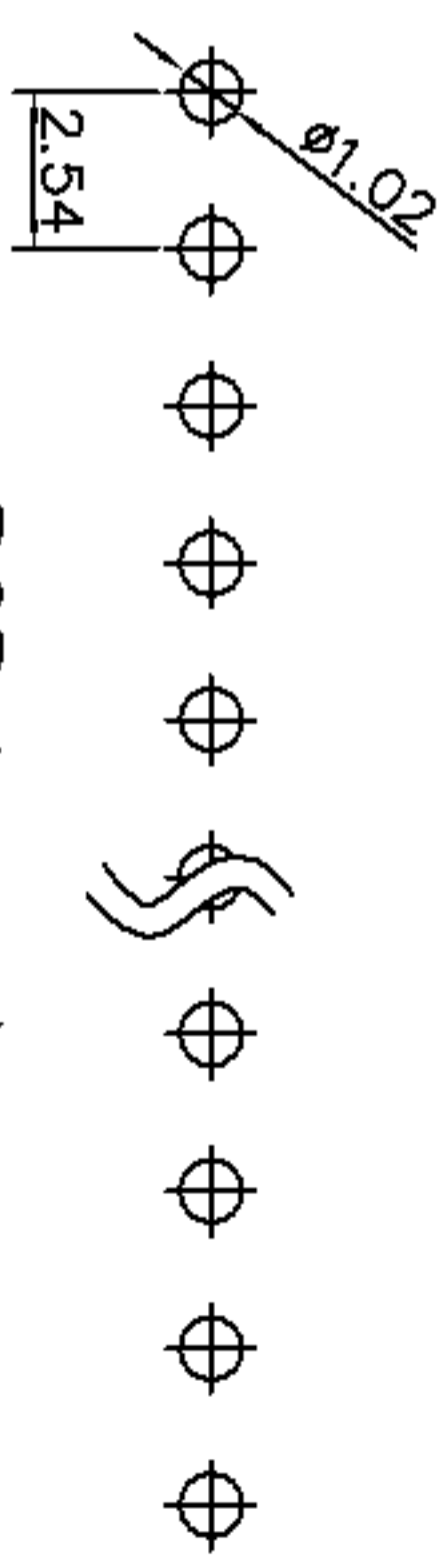
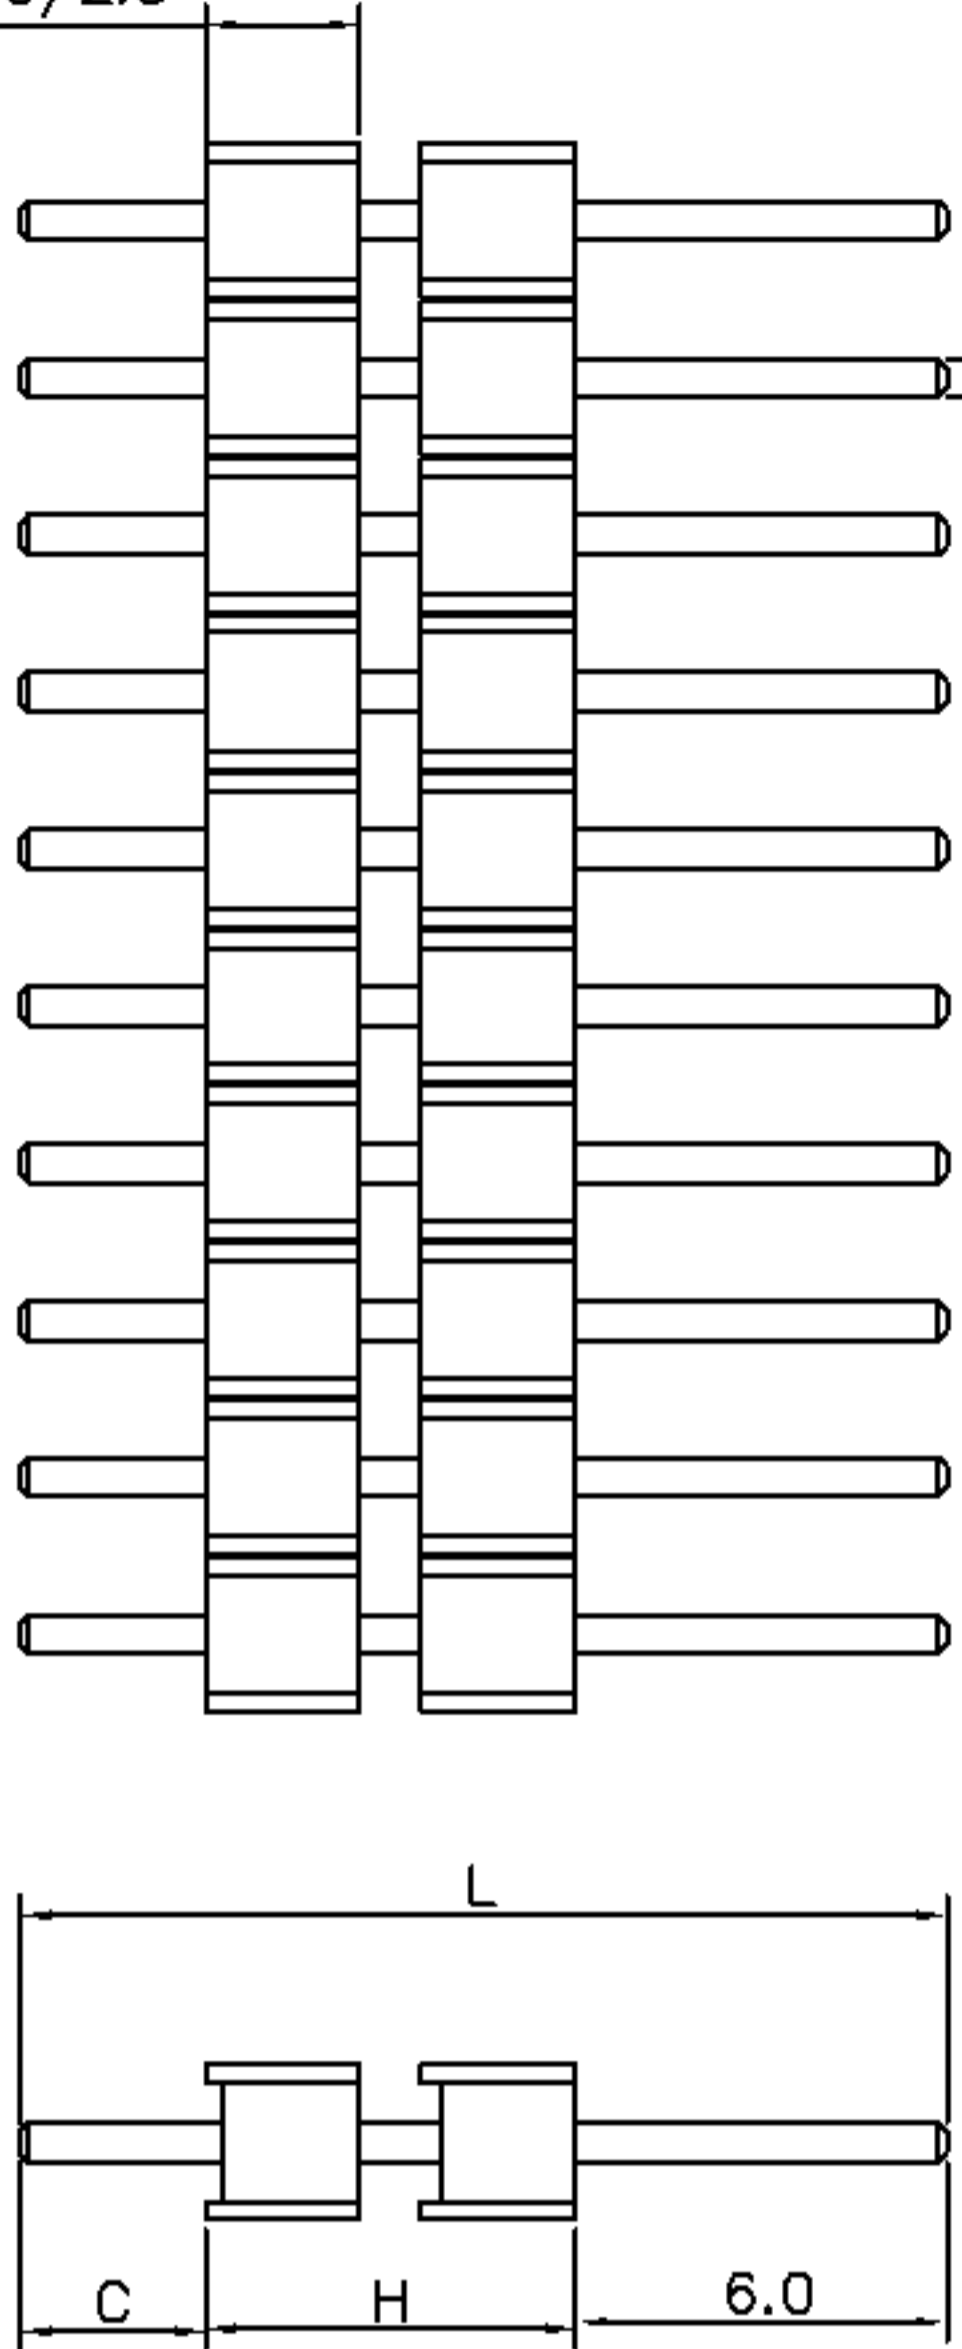


A				
	新版图	/	2012.05.23	L2M

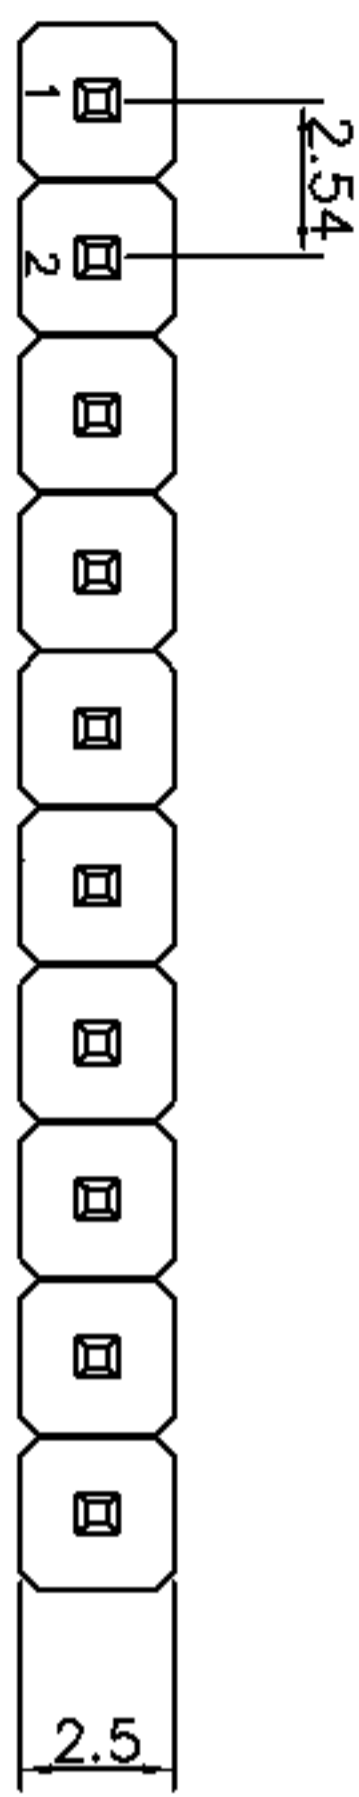


PCB Layout

Technical Data:

Material:
 Contact Material: Brass
 Insulator Material: PBT+30%GF
 Electrical:
 Current rating: 3Amps/Contact max.
 Contact resistance: <=20mohms/Contact
 Insulation resistance: >=1000Mohms at V=100V
 Withstanding Voltage: 550V AC/Minute
 Mechanical:
 Operating Temperature: Gold plated :-55° C~105° C
 Tin plated :-40° C~105° C
 Soldering Temperature: 260° C 10s Max.

H、L、C的尺寸可依客户要求订做

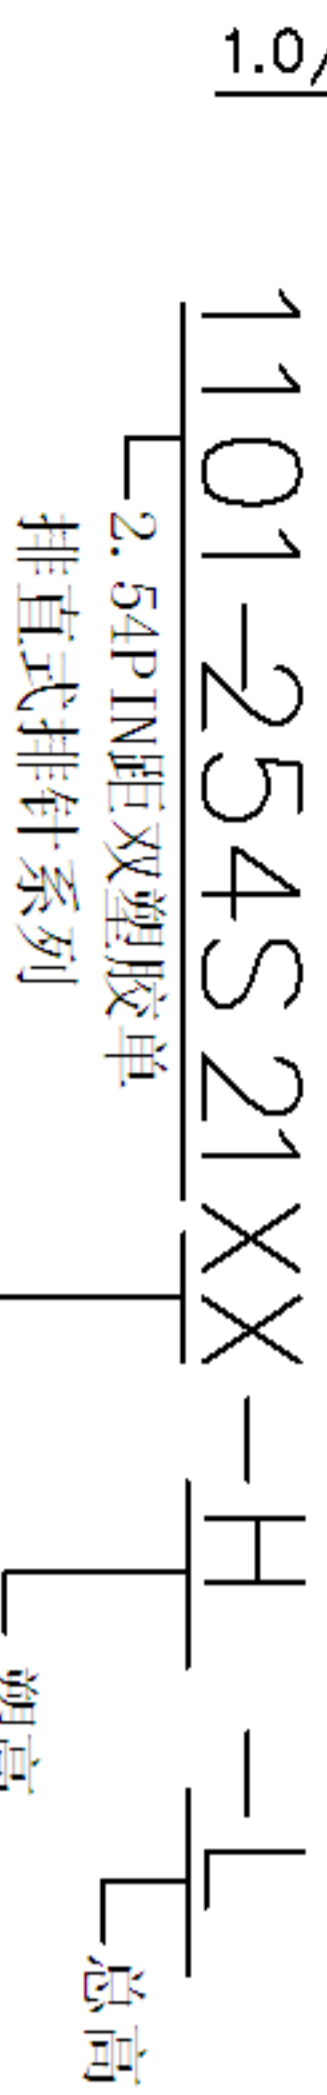

TOLERANCE		ANGLE
TOL ON		
.XXX =	0.05	
XX =	0.15	1°
X -	0.20	2°
X. =	0.30	

DRAWN	DATE	 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD
YSH	2012.05.23	
CHECKED	DATE	TITLE:
CLIENT APPROVED	DATE	排针系列-2.54 PIN距-单排-双塑胶直针
RFQ NO		
CLIENT P/N	1101-254S21XX-XX-XX	
UNIT	mm	SCALE: free
FILE NO.	YH20120525A012	