

**特点**

- 3排 (2排) 32列PCB端连接器
- 引脚为直脚
- 引脚间距: 标准2.54mm
- 源自DIN41612标准

**材料**

- 绝缘体: PBT+30%GF (UL94V-0)
- 引脚: 锡磷青铜


**Features**

- Double or triple are available
- Pin headers can be supplied in straight format
- Pitch: standard 2.54mm
- Be derived from DIN41612

**Material**

- Insulator body: PBT+30%GF(UL94V-0)
- Contact: Phosphorbronze

1833-X32-X2-X

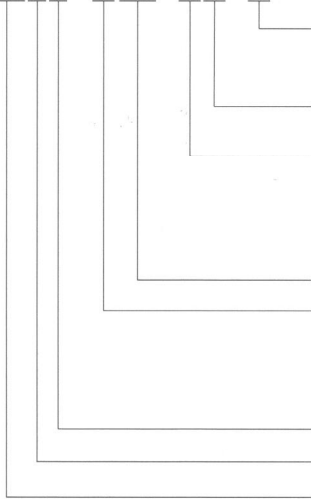

引脚形式 (Contact arrang)  
 0. FULL  
 X. 客户指定 (Customer specifies)  
 电镀等级 CLASS II  
 (Plating Class II)  
 长度代码 (Length Code)

长度代码 (Length Code)	A(mm)
1	4.25
3	12.90

引脚数为32 (Number of contacts 32)  
 引脚排数 (Number of rows)

引脚排数 (Number of rows)	定义 (Definition)
2	2排 (2 rows)
3	3排 (3 rows)

母型引脚 (Female Contacts)  
 压接安装 (Press-fit format)  
 DIN系列编号 (DIN Series Code)

