

REV	MODIFICATION	DATE	DRAW	APPROVE
A	NEW DWG	2007.07.10	HUANG	KEVIN

NOTES

1: MATERIAL:





SHELL: STEEL
 HOUSING: PBT+30%G.F, BLACK, UL94V-0
 CONTACT: PHOSPHOR BRONZE

2: FINISH:

SHELL: NICKEL PLATING
 CONTACT PLATING: GOLD PLATING

3: SPECIFICATION:

CURRENT RATING: 40A
 VOLTAGE RATING: 300V
 CONTACT RESISTANCE: 10mΩ
 WITHSTANDING VOLTAGE: 1000V
 INSULATION RESISTANCE: 5000MΩ
 OPERATING TEMPERATURE: -55°C~105°C

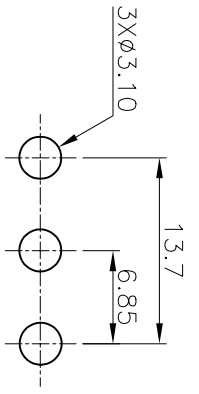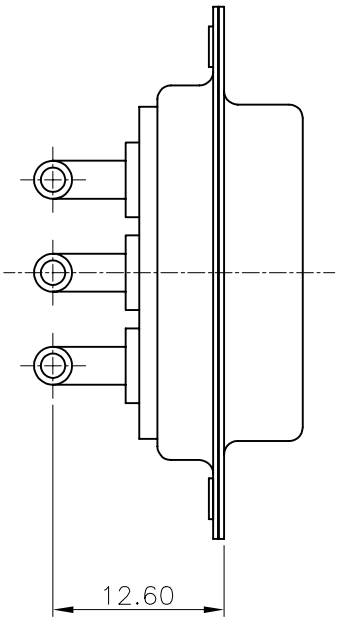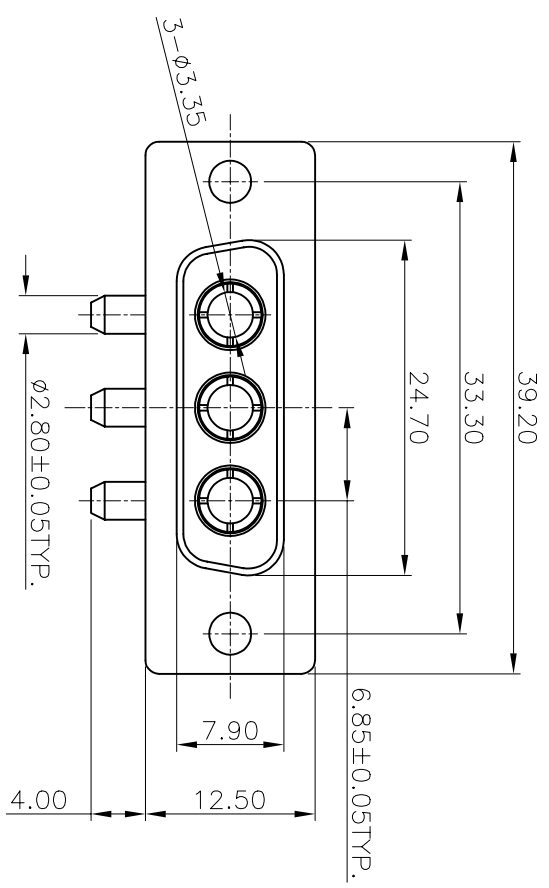

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.08

-TOLERANCES-
 UNLESS OTHERWISE SPECIFIED

X.X	±0.30	X.X°	±3°			TITLE:	3W3 FEMALE 90°成品			
X.XX	±0.15	X.XX°	±1°				APPD: KEVIN	PRODUCT NO: 134-003FKXMK01	DATE	SCALE
X.XXX	±0.10	X.XXX°	±0.5°	CHECK: TENA	DRAW: HUAN	2007.07.10	FRBE	MM	Y	1/1