


REV	MODIFICATION	DATE	DRAW	APPROVE
A	NEW DWG	2007.07.04	HUANG	KEVIN

NOTES
1:MATERIAL:
SHELL: STEEL
HOUSING: PBT+30%G.F, BLACK, UL94V-0
CONTACT: PHOSPHOR BRONZE
2:FINISH:
SHELL: NICKEL PLATING
CONTACT PLATING: GOLD PLATING
3:SPECIFICATION:
CURRENT RATING: 40A
VOLTAGE RATING: 300V
CONTACT RESISTANCE: 20m Ω
WITHSTANDING VOLTAGE:1000V
INSULATION RESISTANCE: 5000M Ω
OPERATING TEMPERATURE: -55°C~105°C

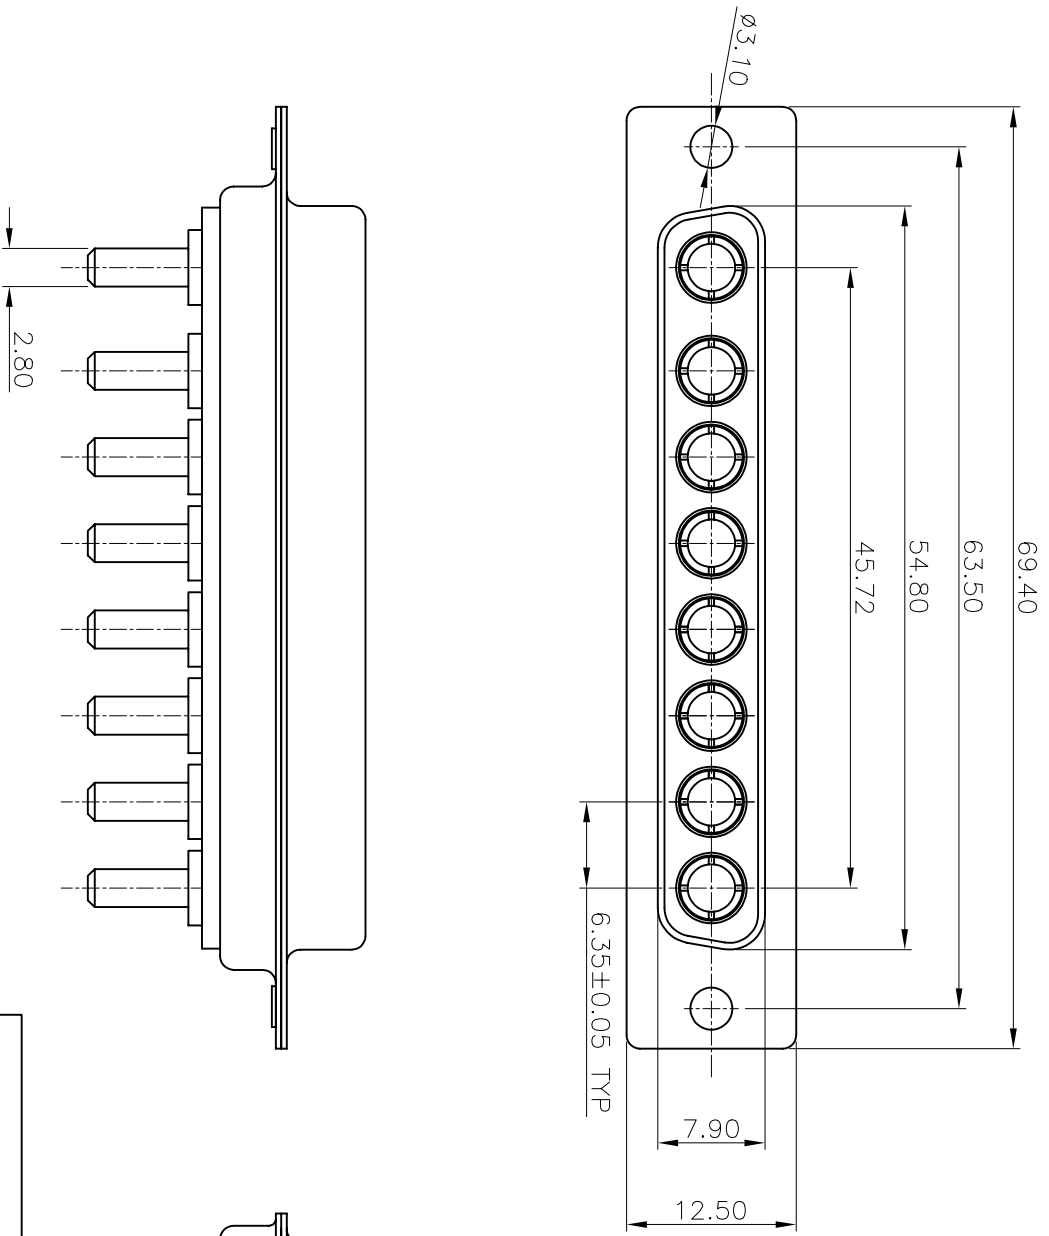

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED

X.X	±0.30	X.X'	±3°	TITLE: 8W8 FEMALE 插板成品	
X.XX	±0.15	X.XX'	±1°	APPD: KEVIN	PRODUCT NO: 133-008FPXMK01
X.XXX	±0.10	X.XXX'	±0.5°	CHECK: TENA	DATE
				DRAW: HUANG	SCALE
					UNIT
					TYPE
					PAGE
					1/1

1	2	3	4	5	6	7	8	9	10
A	B	C	D	E	F	G	A	B	C