

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:






- 1.1 Insulator: L.C.P UL 94-V0 rated.
- 1.2 Contact: Brass T=0.20mm
- 1.3 Shell: Brass T=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) or 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 3u”
- 3.2 Shell:Nickel

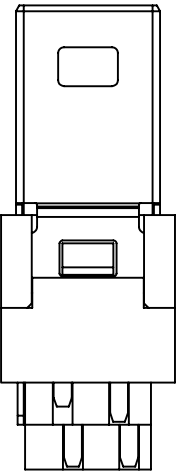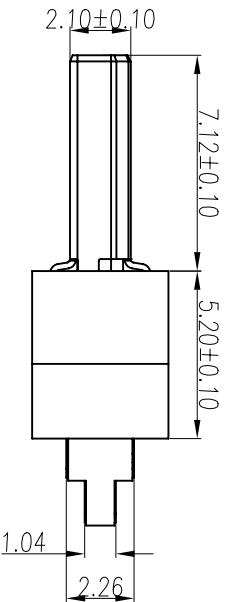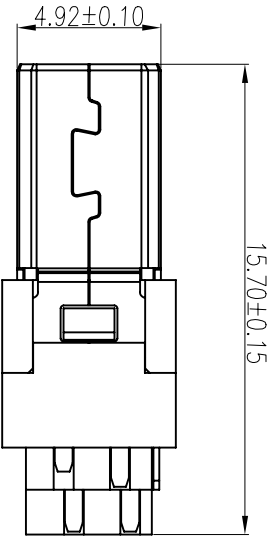

No.	Name	Material	Remarks & Thickness	Finish
3	Shell	Brass	T=0.30	Nickel
2	Contact	Brass	T=0.20	Gold Flashed
1	Housing	L.C.P	UL 94-V0	Black/Ivory

PART NO: MATERIAL:

MODEL NO: FINSH:

UNIT: mm SIZE: A4 COLOR:

TOLERANCE UNSPECIFIED DR: 李霞 '06/05/12

.x ±0.20
.xx ±0.10
.xxx ±0.05
ANG. ±1°

PART NAME: MINI USB-8P焊線式單排

DWG NO: S/A-332

CHK:Kevin'06/05/12
APP:Kent '06/05/12

SCALE: 4:1 SHEET: 1 of 1

REV: A0

