

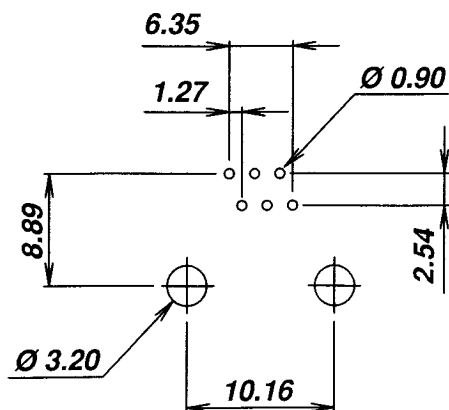
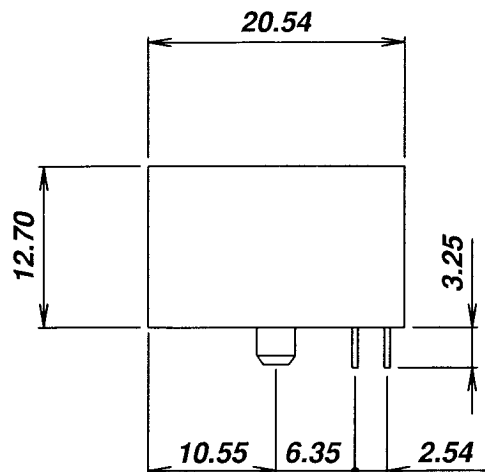


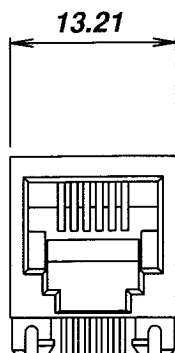

PCB LAYOUT
(Top View)



SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC
Dielectric Voltage : 1,000 RMS 60 Sec. Min.

2. Physical Char.

Housing : PBT Glass Filled (UL 94V-0)
Color : Black Color
Spring Wire : 0.45mm Dia. Phosphor Bronze
Gold Plating Over Nickel
Temperature Range : - 25 +90 C
Durability : 500 Mating cycles Min.

AJ-007-6-X-X-N ← **FLANGELESS**

B=6p2c , C=6p4c
D=6p6c

Gold plated 1=15u , 3=50u
2=30u , 4= 6 u

DWG. NO.
AS007004

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. Steven	DATE SEP-27 '04
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00 ± 0.01 000 ± 0.005 0000 ± 0.002	00 ± 0.25 000 ± 0.13 0000 ± 0.05	CK'D Johnn	SEP-27 '04
$\frac{MM}{INCH}$	ANGLE +0° 30'	RADIL	+0.45 -0.15	APP'D Billy	SEP-27 '04

TITLE
RJ11 or RJ12 SIDE ENTRY PCB JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-007-6-X-X-N

SCALE SIZE DWG. NO. 9636 SERIES