
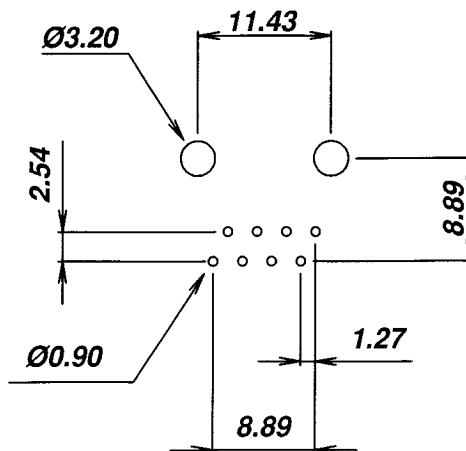






PCB LAYOUT
(Top View)

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)
Color : Black Color
Spring Wire : 0.35mm Thickness Phosphor Bronze
Gold Plating Over Nickel
Temperature Range : - 25 /+90 Deg C
Durability : 500 Mating cycles Min.

AJ-012-9-F-X

F=8p8c

Gold plated	1=15u , 2=30u 3=50u , 4= 6 u
-------------	---------------------------------

DWG. NO.
AS012008

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00 ± 0.01 000 ± 0.005 0000 ± 0.002	00 ± 0.25 000 ± 0.13 0000 ± 0.05	Steven CK'D Johnn APP'D Billy	AUG-23 '04 AUG-23 '04 AUG-23 '04
$\frac{MM}{INCH}$	ANGLE $\pm 30'$	RADIL	$+0.45$ -0.15		AUG-23 '04

TITLE

RJ45 TOP ENTRY PCB JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-012-9-F-X

SCALE SIZE DWG. NO. 9648-1 SERIES