
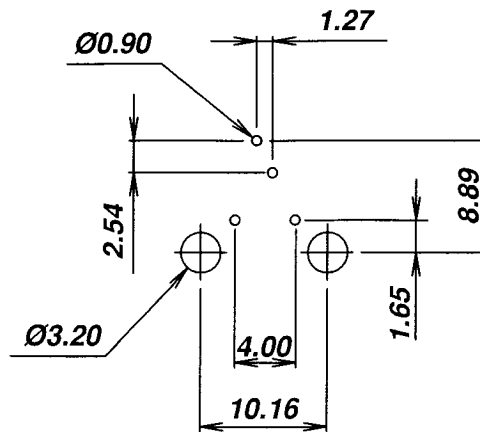

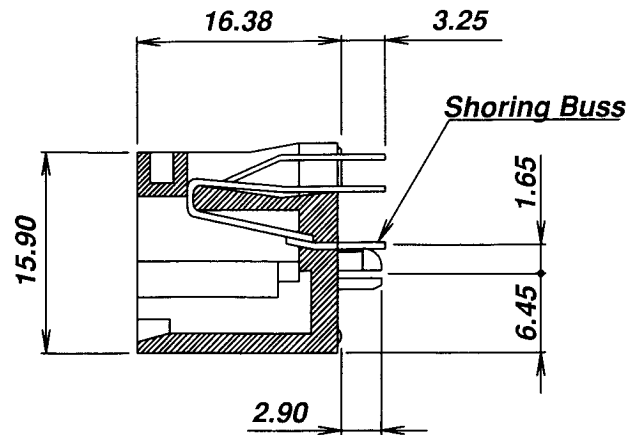


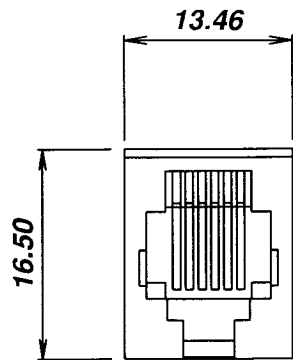

PCB LAYOUT
(Top View)

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC
 Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)
 Color : Black Color
 Spring Wire : 0.45mm Dia. Phosphor Bronze
 Gold Plating Over Nickel
 Temperature Range : - 25 /+90 Deg C
 Durability : 500 Mating cycles Min.

AJ-013-6-B-X-N ← **FLANGELESS**

B=6p2c

Gold plated 1=15u , 3=50u
2=30u , 4= 6 u

DWG. NO.
AS013001

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	Steven CK'D Johnn APP'D Billy	SEP-13 '04 SEP-13 '04 SEP-13 '04
$\frac{MM}{INCH}$	ANGLE +Ø'30'	RADIL	+0.45 -0.15		

TITLE
RJ11 or RJ12 TOP ENTRY PCB JACK WITH
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-013-6-B-X-N

SCALE SIZE DWG. NO. 9612 SERIES