

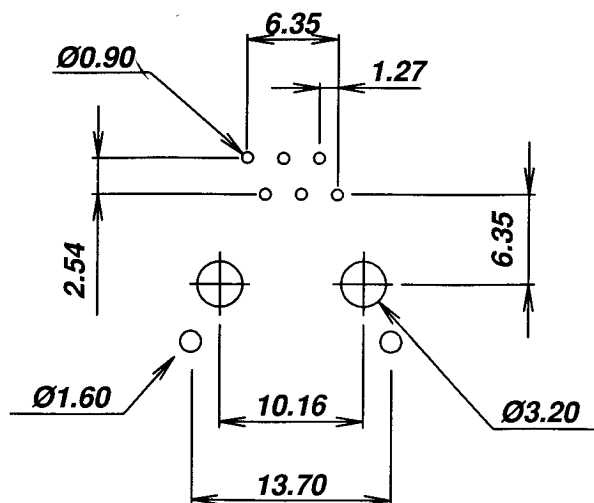
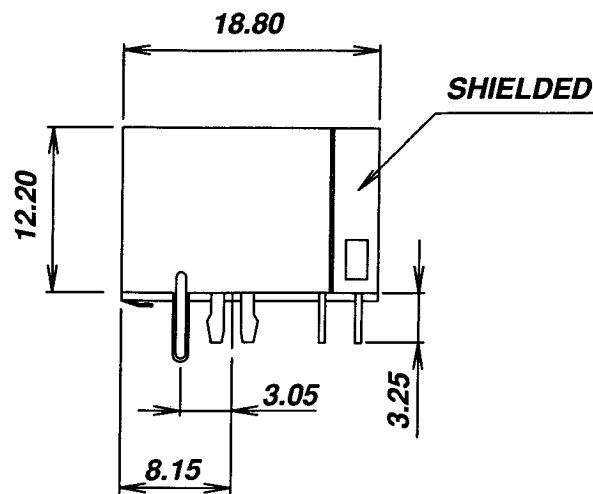


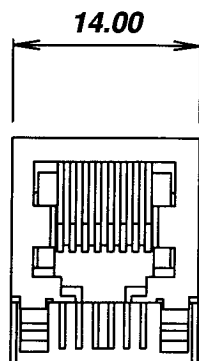

**PCB Layout
(Top View)**



SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.

Contact Resistance : 20milli-Ohm Max.

Rating Current : 1.5A Max.

Rating Voltage : 120V AC

Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)

Color : Black Color

Spring Wire : 0.45mm Dia. Phosphor Bronze

Gold Plating Over Nickel

Temperature Range : - 25 /+90 Deg C

Durability : 500 Mating cycles Min.

AJ-019SH-6-X-X-A1-N1

B=6p2c , C=6p4c
D=6p6c

Gold plated 1=15u , 3=50u
2=30u , 4= 6 u

DWG. NO.
AS019020

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00 ± 0.01 000 ± 0.005 0000 ± 0.002	00 ± 0.25 000 ± 0.13 0000 ± 0.05	Steven CK'D Johnn APP'D Billy	JAN-12 '05 JAN-12 '05 JAN-12 '05
MM INCH	ANGLE $+0^{\circ}30'$	RADIL	$+0.45$ -0.15		

TITLE
VERY LOW PROFILE PCB SHIELDED JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-019SH-6-X-X-A1-N1

SCALE SIZE DWG. NO. 9695S SERIES