

500 600 Serie

Double Deck Gang Jack - SINGLE PORT

Specifications


Material

Housing :	High Strength Thermoplastic Polyester
Contacts :	Phosphor Bronze
Contact Plating :	Gold Over Nickel On Mating Ared, Tin-lead Alloy On Tails
Shield :	Copper Alloy, Tin Plated


Electrical

UL & cUL File :	E131820
FCC File :	E149026

Ordering Information

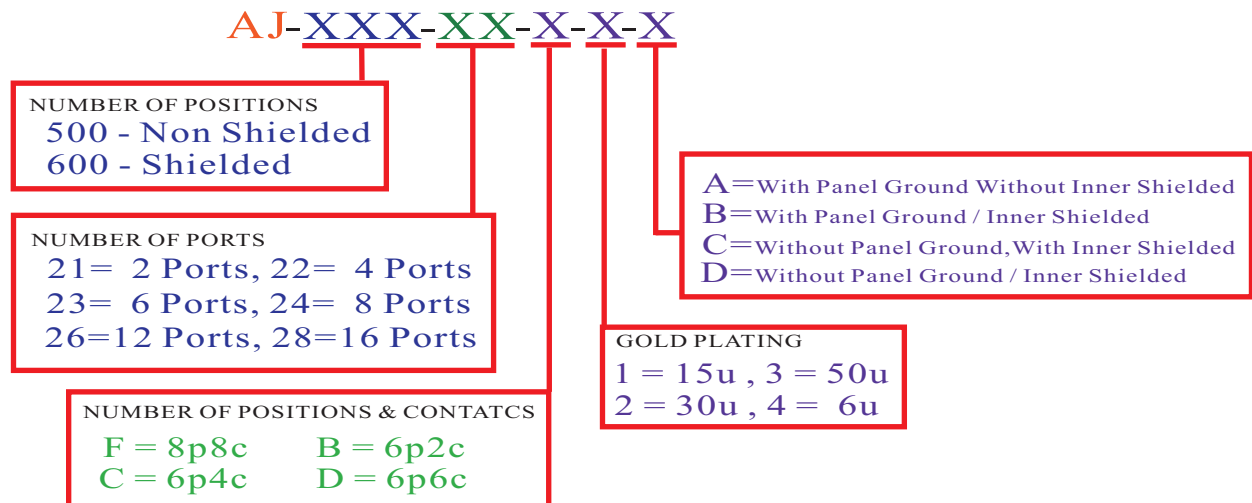


PCB Layout

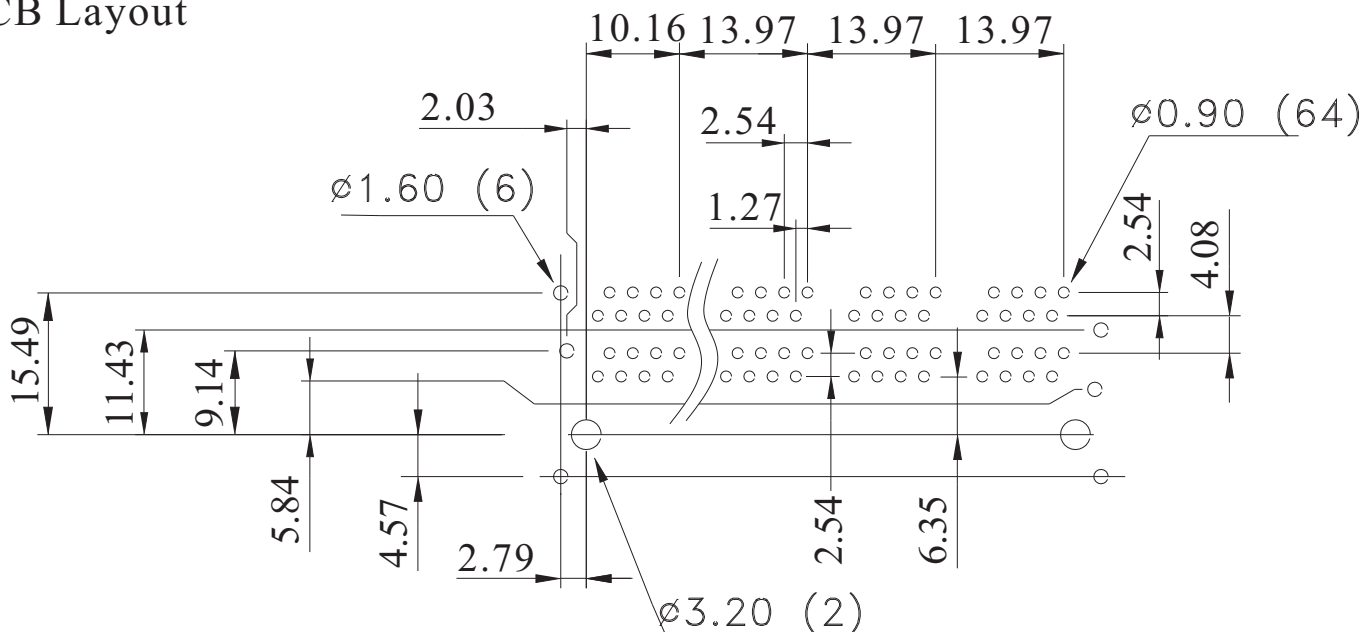


500 600 Serie


Double Deck Gang Jack - SINGLE PORT

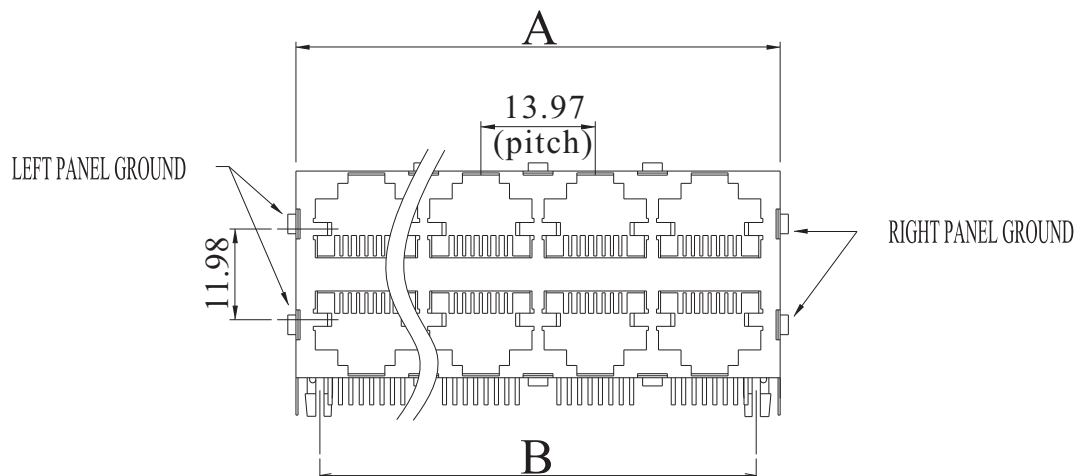


Number Of positions	21	22	23	24	26	28
AJ-500 (A)	16.50	30.50	34.50	48.50		
AJ-500 (B)	11.43	25.40	39.37	53.34		
AJ-600 (A)	17.25	31.25	45.25	59.25	87.25	115.25
AJ-600 (B)	11.43	25.40	39.37	53.34	81.28	109.22

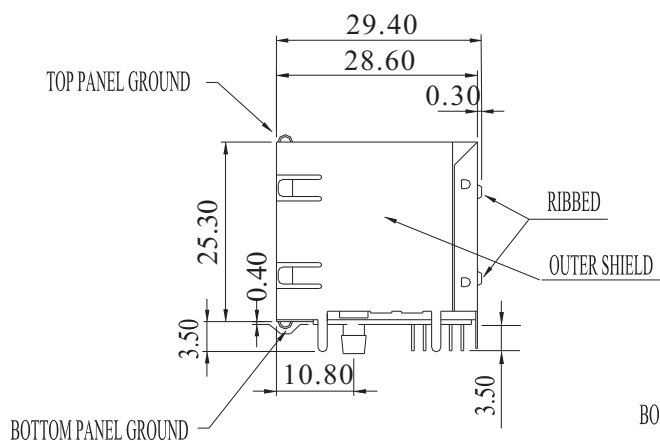


(A)

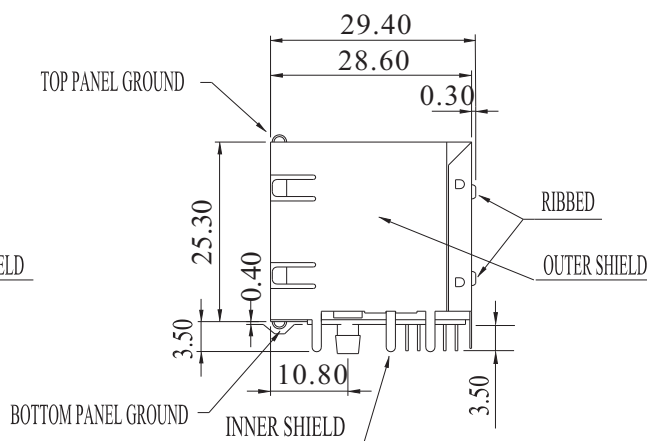

(B)

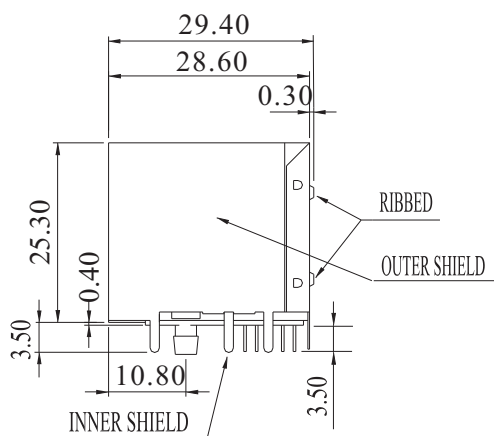

(C)

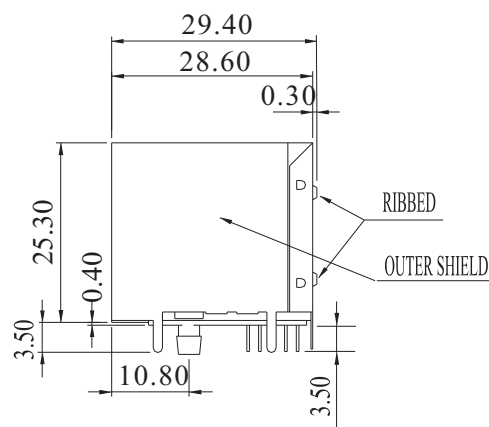

(D)