

REV	DATE	MODIFICATION	DRAWN
11/05/05			

SPECIFICATIONS
1. ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
INSULATION RESISTANCE: 100 MΩ.
TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:
CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
DURABILITY : 200 MATING CYCLES.
3. MATERIAL & FINISH:
HOUSING: POLYCARBONATE. UL94V-0 OR UL94V-2.
COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: PHOSPHOR BRONZE.
CONDUCTOR : STRANDED & SOLID WIRE, 24AWG, 26 AWG.
GOLD PLATING: 3μ"~50μ" ARE AVAILABLE.








规范
1. 电器 :

UL应用最大250VOLTS AC.
介质耐电压伏特数:500VOLTS AC.
绝缘阻抗:100百万欧姆.
终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构
拉力测试:至少19. 6N/PCS.
耐力测试:至少200次之插拔测试.
3. 材质表面处理
塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.
颜色:透明,或者其他颜色亦可.
金片:磷铜片.
导体:多股线&单股线,24AWG,26AWG.
镀金厚度:3μ"~50μ",皆可提供.

客户用产品图

Type	E	B	Y	Z
Drawing				
Mark				

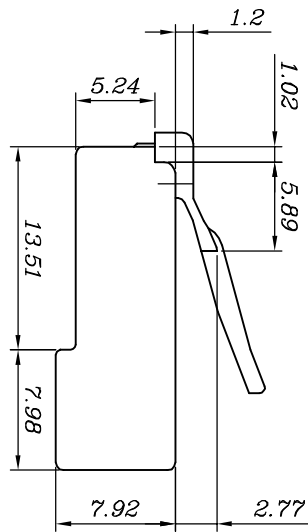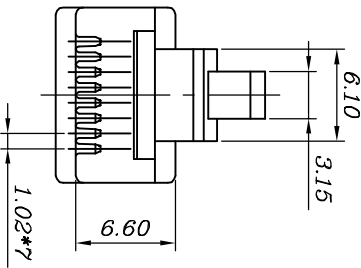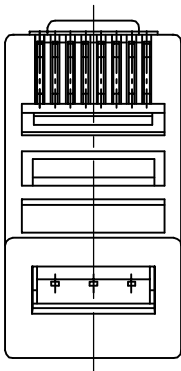

Round

Flat

图号		图号	
MATERIAL	PC	PLUG-009-EXW	
DIMENSION IN mm (inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		图号	
.X±0.20	.X°±5°	图号	
.XX±0.10	.XX°±2°	图号	
审核	核对	图号	
APPROVAL	CHECKED	图号	
制图		图号	
Lucia		图号	
比例		图号	
2/1		图号	
角法		图号	
PROJ.		图号	
REV		图号	
A		图号	

1

2

3

4

5

6

ST-DR-009A

7