

REV	DATE	MODIFICATION	DRAWN
	11/05/05		

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.

DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.

INSULATION RESISTANCE: 100 M Ω .

TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.

DURABILITY: 200 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.

COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.

CONTACT BLADE: PHOSPHOR BRONZE.

CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.

GOLD PLATING: 3u"~.50u", ARE AVAILABLE.

规范

1. 电器:

UL应用最大250VOLTS AC.

介质耐电压伏特数:500VOLTS AC.

绝缘阻抗:100百万欧姆.

终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构

拉力测试:至少19.6N/PCS.

耐力测试:至少200次之插拔测试.

3.材质表面处理

塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.

颜色:透明,或者其他颜色亦可.

金片:磷铜片.








导体:多股线&单股线.24AWG,26AWG.

镀金厚度:3u"~50u",皆可提供.

客 户 用 产 品 图

Type	E-03	B-03	Y-03	Z-03
Drawing				
Mark				

BLADE:

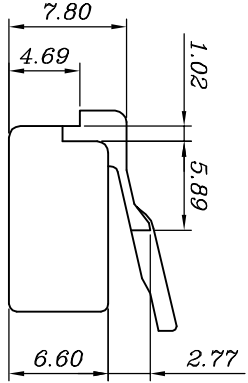

Round

Flat

DIMENSION IN mm (inch)		材 质	图 号
TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL	DWG NO.
.X $\pm$ 0.20	.X $\pm$ 5 $^{\circ}$	PC	PLUG-001-EXW
.XX $\pm$ 2 $^{\circ}$		名 称	PLUG-4P2C
.XX $\pm$ 0.10		DESCRIPTION	
审核	核对	制图	比例
APPROVAL	CHECKED	Lucia	SCALE 2/1
			张数 1/1
			更改 更改
			REV A