

REV	DATE	MODIFICATION	DRAWN
	11/05/05		

SPECIFICATIONS
1. ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
INSULATION RESISTANCE: 100 MΩ.
TERMINATION: RESISTANCE: 20mΩ MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:
CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
DURABILITY: 200 MATING CYCLES.
3. MATERIAL & FINISH:
HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: PHOSPHOR BRONZE.
CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
GOLD PLATING: 3u"~50u" ARE AVAILABLE.

规范
1. 电器:

UL应用最大250V VOLTS AC.
介质耐电压伏特数: 500V VOLTS AC.
绝缘阻抗: 100百万欧姆.
终端阻抗: 在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构

拉力测试: 至少19.6N/PCS.
耐力测试: 至少200次之插拔测试.





3. 材质表面处理

塑胶壳: 聚碳酸酯, UL-94V-0 or UL94V-2.
颜色: 透明, 或者其他颜色亦可.
金片: 磷铜片.
导体: 多股线 & 单股线, 24AWG, 26AWG.
镀金厚度: 3u"~50u", 皆可提供.

客户用产品图

BLADE:

Type	E-03	B-03	Y-03	Z-03
Drawing				
Mark				

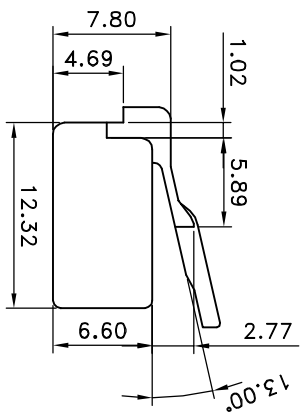

卓新工业股份有限公司 EXCELLENCE WIRE IND.CO.,LTD			
DIMENSION IN mm (inch)	MATERIAL	图号 DWG NO.	名称 DESCRIPTION
TOLERANCE UNLESS OTHERWISE SPECIFIED	PC	PLUG-004-EXW	PLUG-6P2C
.X±0.20	.X°±5°	制图 DRAWN	张数 SHEET
.XX±0.10	.XX°±2°	审核 APPROVAL	更改 REV
核对 CHECKED	Lucia	比例 SCALE	1/1
		角法 PROJ.	A