

REV	DATE	MODIFICATION	DRAWN
11/05/05			

SPECIFICATIONS
1. ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
INSULATION RESISTANCE: 100 MΩ.
TERMINATION: 20mm Ø, MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:
CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
DURABILITY: 200 MATING CYCLES.
3. MATERIAL & FINISH:
HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: PHOSPHOR BRONZE.
CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
GOLD PLATING: 3μ"~50μ", ARE AVAILABLE.

规范

1. 电器：

UL应用最大250VOLTS AC.

介质耐电压伏特数:500VOLTS AC.

绝缘阻抗:100百万欧姆.

终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构

拉力测试:至少19.6N/PCS.

耐力测试:至少200次之插拔测试.

3. 材质表面处理

塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.

颜色:透明,或者其他颜色亦可.

金片:磷铜片.


导体:多股线&单股线.24AWG,26AWG.

镀金厚度:3μ"~50μ",皆可提供.

客 户 用 产 品 图

BLADE:

Type	E-03	B-03	Y-03	Z-03
Drawing				
Mark				

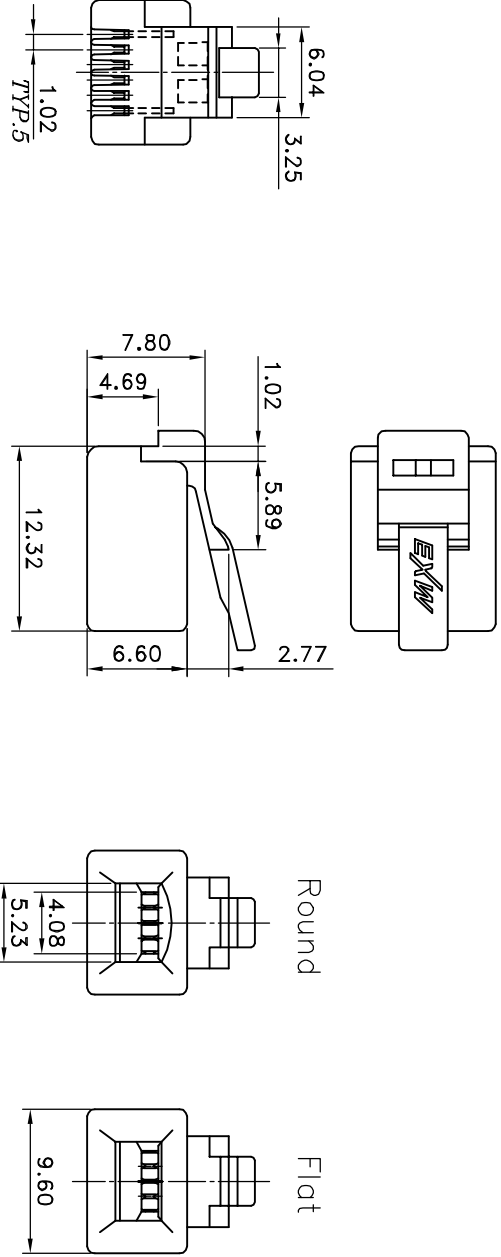

DIMENSION IN mm (inch)		材 质	图 号
TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL	DWG NO.
.X±0.20	.X°±2°	PC	PLUG-005-EXW
.XX±0.10		名 称	PLUG-6P4C
.XX°±2°		DESCRIPTION	
审核	核对	制图	比例
APPROVAL	CHECKED	Lucia	2/1
			张数
			1/1
			更改
			REV
			A

A- B- C- D- 1 2 3 4 5 6 7