

更改 REV	出 图 日 期 DATE	设 变 内 容 MODIFICATION	修 改 DRAWN
	11/05/05		

SPECIFICATIONS

1. ELECTRICAL:
- UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
- DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
- INSULATION RESISTANCE: 100 MΩ.
- TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.
2. MECHANICAL:
- CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
- DURABILITY: 200 MATING CYCLES.
3. MATERIAL & FINISH:
- HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
- COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
- CONTACT BLADE: PHOSPHOR BRONZE.
- CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
- GOLD PLATING: 3μ"~50μ" ARE AVAILABLE.

规范

1. 电器:

UL应用最大250VOLTS AC.

介质耐电压伏特数:500VOLTS AC.

绝缘阻抗:100百万欧姆.

终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构

拉力测试:至少19.6N/PCS.

耐力测试:至少200次之插拔测试.

3. 材质表面处理

塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.

颜色:透明,或者其他颜色亦可.

金片:磷铜片.


导体:多股线&单股线,24AWG,26AWG.

镀金厚度:3μ"~50μ",皆可提供.

客 户 用 产 品 图

BLADE:

Type	E-03	B-03	Y-03	Z-03
Drawing				
Mark				

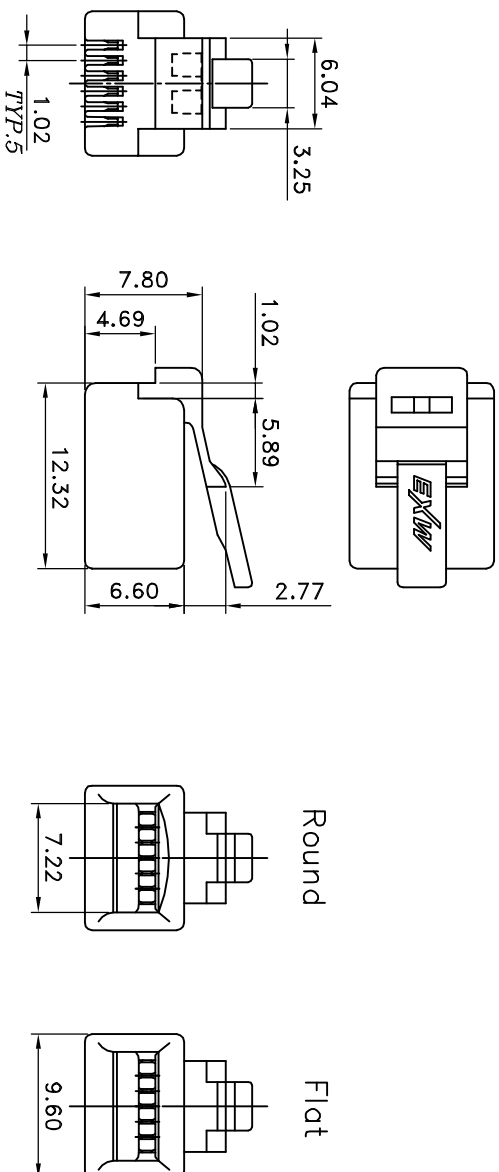

DIMENSION IN mm (inch)		材 质 MATERIAL	图 号 DWG NO.
TOLERANCE UNLESS OTHERWISE SPECIFIED		PC	PLUG-006-EXW
.X±0.20	.X°±2°	名 称 DESCRIPTION	PLUG-6P6C
审核 APPROVAL	核对 CHECKED	制图 DRAWN	张数 SHEET
		Lucia	更改 REV
			A