

REV	DATE	MODIFICATION	DRAWN
11/05/05			

SPECIFICATIONS
1.ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.
INSULATION RESISTANCE: 100 MΩ.
TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.



2.MECHANICAL:
CABLE-TO-PLUG TENSILE STRENGTH :19.6N/PCS MIN.
DURABILITY : 200 MATING CYCLES.
3. MATERIAL & FINISH:
HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: PHOSPHOR BRONZE.
CONDUCTOR : STRANDED & SOLID WIRE, 24AWG, 26 AWG.
GOLD PLATING: 3μ"~.50μ" ARE AVAILABLE.

规范
1. 电器 :
UL应用最大250VOLTS AC.
介质耐电压伏特数:500VOLTS AC.
绝缘阻抗:100百万欧姆.
终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构
拉力测试:至少19.6N/PCS.
耐力测试:至少200次之插拔测试.
3.材质表面处理
塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.
颜色:透明,或者其他颜色亦可.
金片:磷铜片.
导体:多股线&单股线.24AWG,26AWG.
镀金厚度:3μ"~50μ",皆可提供.

客 户 用 产 品 图

Type	E-03	B-03	Y-03	Z-03
Drawing				
Mark				

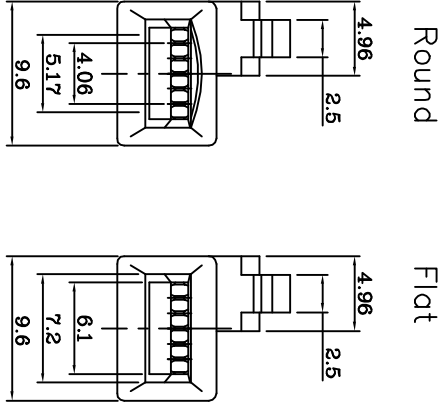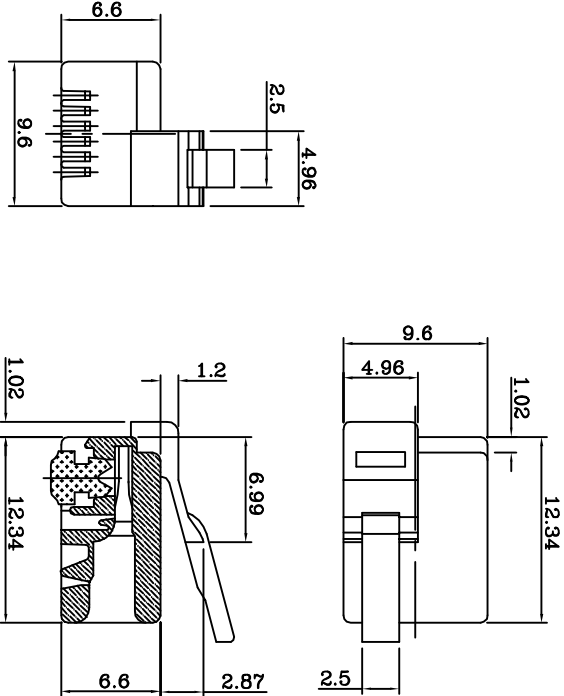

DIMENSION IN mm (inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材 质 MATERIAL	图 号 DWG NO.
.XX±0.20	.XX±.2°	PC	
.XX±0.10		名 称 DESCRIPTION	PLUG-6P DEC TYPE
审 核 APPROVAL	核 对 CHECKED	制 图 DRAWN	比 例 SCALE
		Lucia	2/1
		角 法 PROJ.	张 数 SHEET
			1/1
		更 改 REV	A

A- B- C- D- 1 2 3 4 5 6 7