

REV	DATE	MODIFICATION	DRAWN
11/05/05			

SPECIFICATIONS
1. ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
INSULATION RESISTANCE: 100 MΩ.
TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:
CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
DURABILITY : 200 MATING CYCLES.
3. MATERIAL & FINISH:
HOUSING: POLYCARBONATE. UL94V-0 OR UL94V-2.
COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: PHOSPHOR BRONZE.
CONDUCTOR : STRANDED & SOLID WIRE, 24AWG, 26 AWG.
GOLD PLATING: 3u"~50u" ARE AVAILABLE.






规范
1. 电器 :

UL应用最大250VOLTS AC.
介质耐电压伏特数:500VOLTS AC.
绝缘阻抗:100百万欧姆.
终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构
拉力测试:至少19. 6N/PCS.
耐力测试:至少200次之插拔测试.
3. 材质表面处理
塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.
颜色:透明,或者其他颜色亦可.
金片:磷铜片.
导体:多股线&单股线,24AWG,26AWG.
镀金厚度:3u"~50u",皆可提供.

客户用产品图

Type	E	B	Y	Z
Drawing				
Mark				

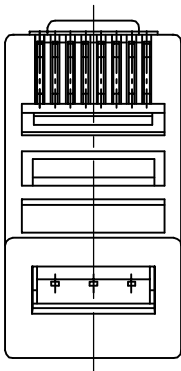

Round

Flat

图号		材 质		图号	
PC		PLUG-009-EXW		PLUG-8P	
DIMENSION IN mm (inch)		TOLERANCE UNLESS OTHERWISE SPECIFIED		X°±5°	
.X°±0.20		.XX°±2°		X°±5°	
审核		核 对		制 图	
APPROVAL		CHECKED		DRAWN	
Lucia		Lucia		Lucia	
比例		SCALE		张数	
2/1		2/1		1/1	
角法		角法		更改	
PROJ.		PROJ.		REV	
A		A		A	

1

2

3

4

5

6

ST-DR-009A

7