
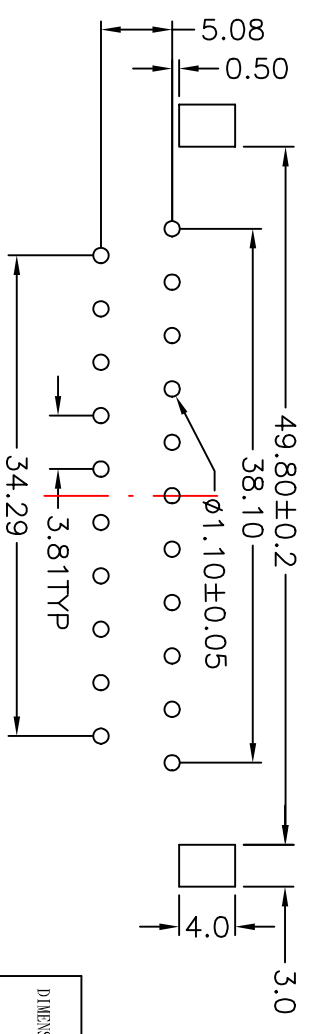
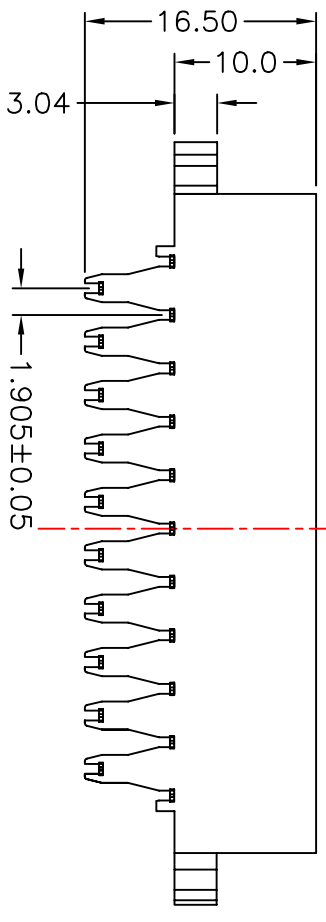
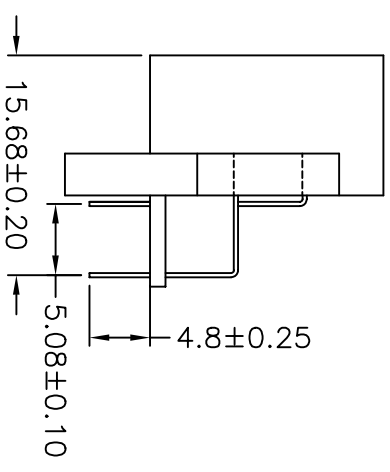


REV.	NOTES	DATE
A	RELEASED	2003/12/05
B	0.90±0.05 變更爲0.94±0.03 Δ	2004/06/09

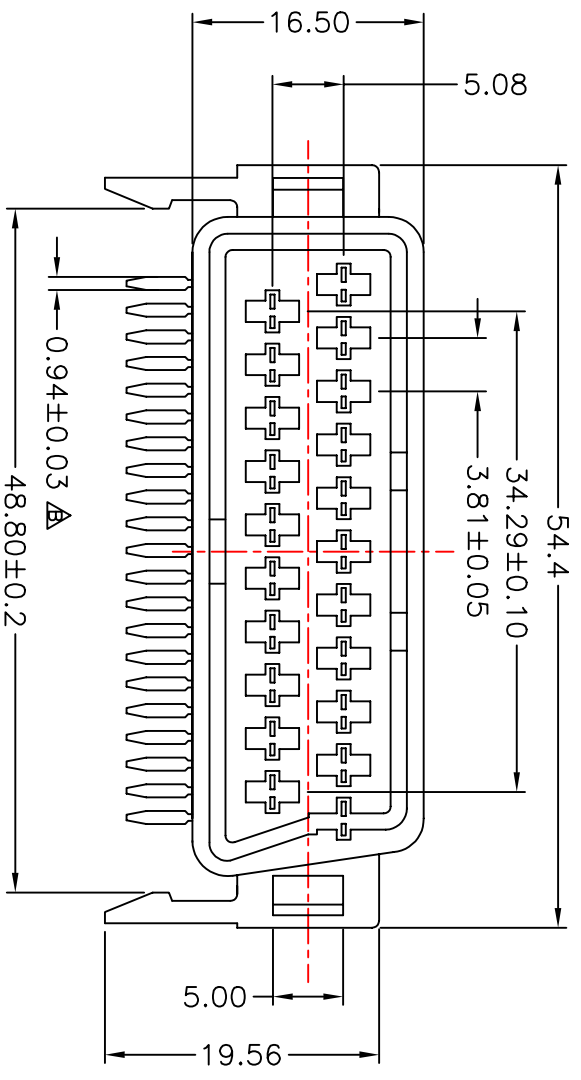

- NOTES:
1. MATERIALS
- 1.1 Insulator: Pc
 - 1.2 Contact: Brass
 - 1.3 Contact Plating: Tin Plated
2. SPECIFICATIONS
- 2.1 Current Rating: 5Amp
 - 2.2 Dielectric Strength: 1000V AC for one minute
 - 2.3 Insulator Resistance: 5000MΩ Min.(at 500V DC)
 - 2.4 Operation Temperature: -55°C to +105°C

DIMENSIONS TOLERANCE

METRIC

0 = ±.3

.00 = ±.20

.000 = ±.XXX

.0000 = ±.

ANG. = ±2°

單位 (UNITS)	mm
數量 (QTY)	N/A
材料 (MTR'L)	SEE NOTE
處理 (FINISH)	SEE NOTE
繪圖 (DRAW)	
設計 (DE'N)	
審核 (CHK'K)	
核准 (APP' D)	

圖名 (NAME)	
90度母座有柱有孔錫反向 PC 無毒	
料號 (PART NUMBER)	ASC+0350-40C4
圖號 (DRAW NUMBER)	RASC035040C4
圖檔 (FILE NAME .DWG)	E:GCT/A/SC/03
比例 (SCALE)	1/1
圖紙 (SHEET)	A4
頁次 (SHEET)	1
版本 (REV.)	B

PCB LAYOUT