
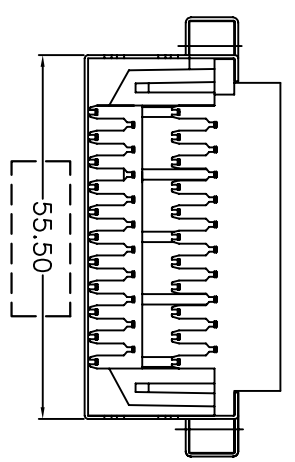
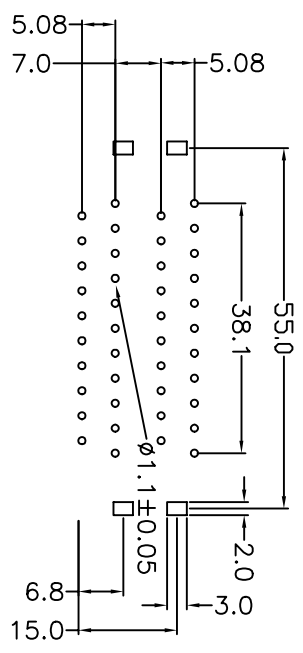
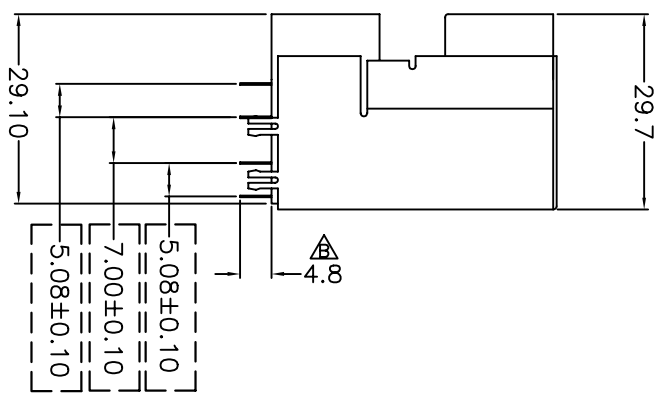


REV.	NOTES	DATE
A	RELEASED	2005/12/01
B	增標尺寸4.80	2006/02/21
C	重點尺寸標示和產品規範說明	2007/02/10

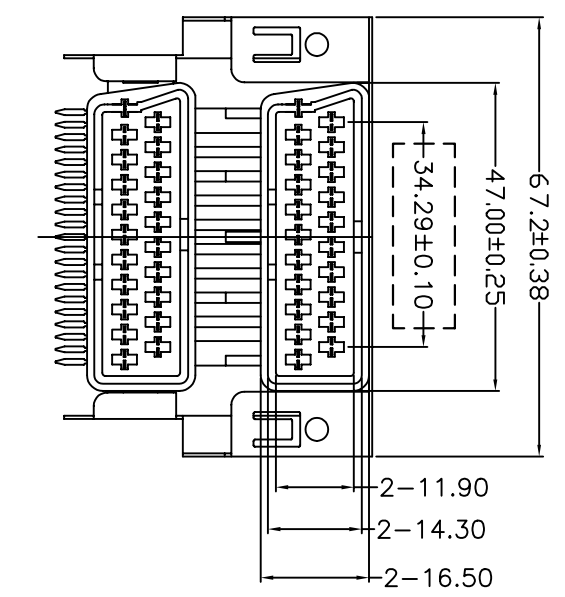

- NOTES:
- MATERIALS
 - Insulator:PC
 - Contact:Brass, 0.3T
 - SPECIFICATIONS
 - Current Rating: 3 Amp
 - Dielectric Strength:1000V AC for one minute
 - Insulator Resistance:1000M ohms Min
 - contact Resistance:25m ohms Max
 - Operation temperature:-55°C to +105°C
 - INSERTION FORCE:9.0KG Max
 - WITHDRAWAL FORCE:1.5KG Min

備注:
重點尺寸標示: [XX]

DIMENSIONS TOLERANCE		METRIC	
0 = ±.30		0 = ±.30	
.00 = ±.20		.00 = ±.20	
.0000 = ±.XXX		.0000 = ±.XXX	
ANG. = ±2°		ANG. = ±2°	

單位 (UNITS)	mm	圖名 (NAME)
數量 (QTY)	N/A	90度雙層母座分體式PC 無柱加鐵殼 無毒
材料 (MTR'L)	SEE NOTE	
處理 (FINISH)	SEE NOTE	
繪圖 (DRAW)		
設計 (DE'N)		
審核 (CHK)		
核准 (APP'D)		

料號 (PART NUMBER)	ASC-050K-40C3
圖號 (DRAW NUMBER)	RASC050K40C3
圖檔 (FILE NAME .DWG)	E:GCT/A/SC
比例 (SCALE)	1/1
圖紙 (SHEET)	A4
頁次 (SHEET)	1
版本 (REV.)	C