
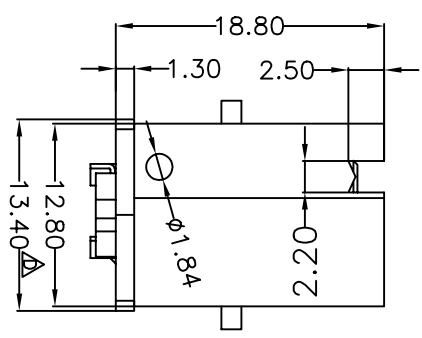
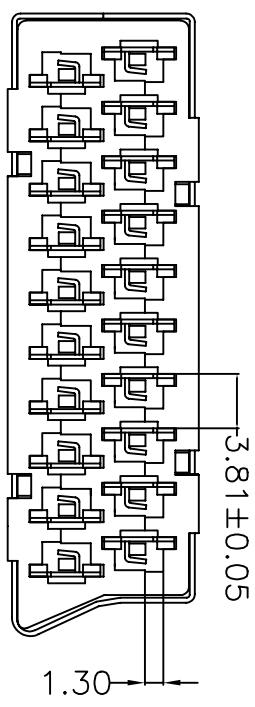
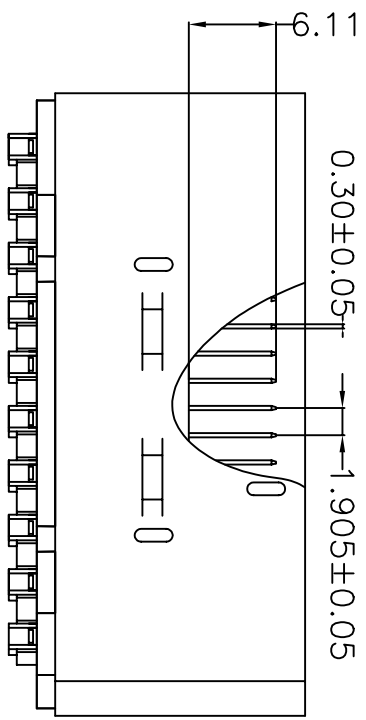


REV.	NOTES	DATE
A	RELEASED	2006/06/28
B	增加料號: API+0200-40B10	2006/10/24
C	AMEND NOTES	2007/01/16
D	14.90變更為13.40 Δ	2007/01/18

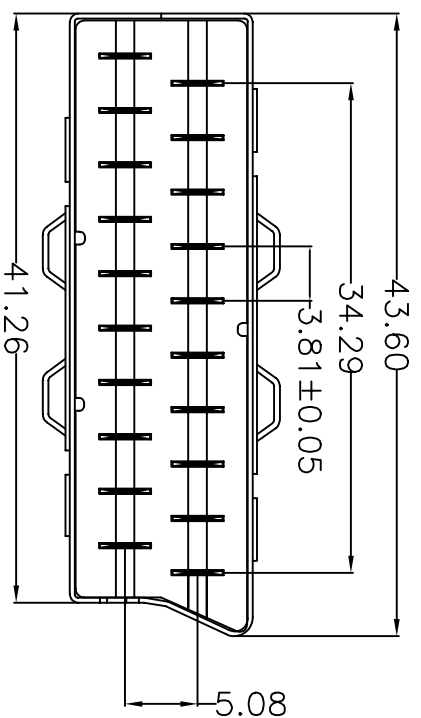

- NOTES:
- MATERIALS
 - Insulator: PBT
 - Contact: Brass, 0.3T, TIN PLATED.
 - Shell Spec: Brass or Stainless 430# 0.35T.
 - SPECIFICATIONS
 - Current Rating: 3Amp
 - Dielectric Strength: 1000V AC
 - Insulator Resistance: 1000M OHMS Min. (at 500V DC)
 - Contact Resistance: 25m OHMS MAX
 - Operation Temperature: -55°C to +105°C

PART NO.	PLATED
ASC+0200-40B9	亮鍍
ASC+0200-40B10	霧鍍

DIMENSIONS TOLERANCE		圖名 (NAME)	
METRIC		成型端PIN錫 PBT 有鍍殼亮鍍 無毒	
0 = ±.20	設計 (DE' N)	料號 (PART NUMBER)	ASC+0200-40B9
.00 = ±.15	審核 (CH' K)	圖號 (DRAW NUMBER)	RASC020040B9
.0000 = ±.XXX	核准 (APP' D)	圖檔 (FILE NAME .DWG)	E:\CCT/P/SC/3/300
ANG. = ±2'		比例 (SCALE)	1/1
		圖紙 (S/DWG)	A4
		頁次 (SHEET)	1
		版本 (REV.)	D

