
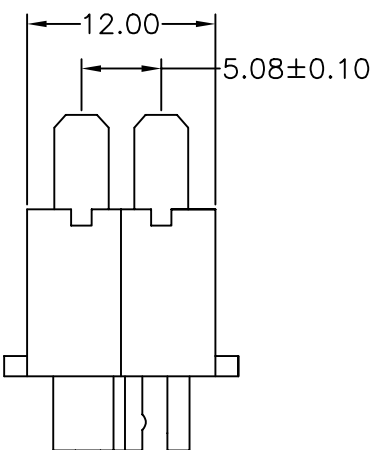


REV.	NOTES	DATE
A	RELEASED	2003/11/17


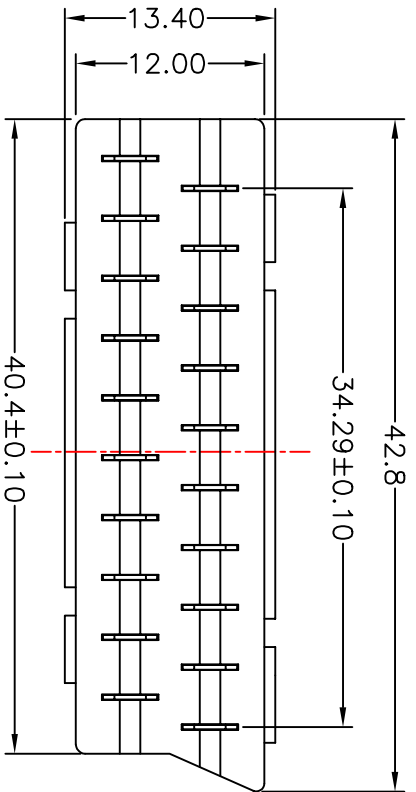


ORDER INFORMATION:

Part No	Plating
ASC+0200-40B1	TIN PLATED
ASC+0200-10B	GOLD PLAED
ASC+0200-40B	TIN PLATED

NOTES:

1. MATERIALS
- 1.1 INSULATOR: P.B.T 30% GLASS FIBER UL-94V-0
- 1.2 CONTACT: BRASS 0.3T
2. SPECIFICATIONS
- 2.1 CURRENT RATING: 3.0AMP
- 2.2 DIELECTRIC STRENGTH: 1000V AC FOR ONE MINUTE
- 2.3 INSULATOR RESISTANCE: 1000M OHMS MIN
- 2.4 CONTACT RESISTANCE: 30M OHMS MAX
- 2.5 OPERATION TEMPERATURE: -55 °C TO +105 °C

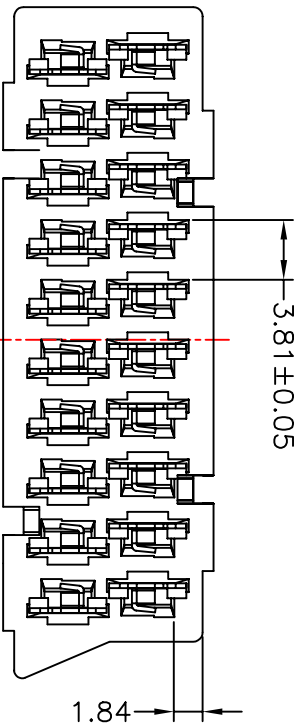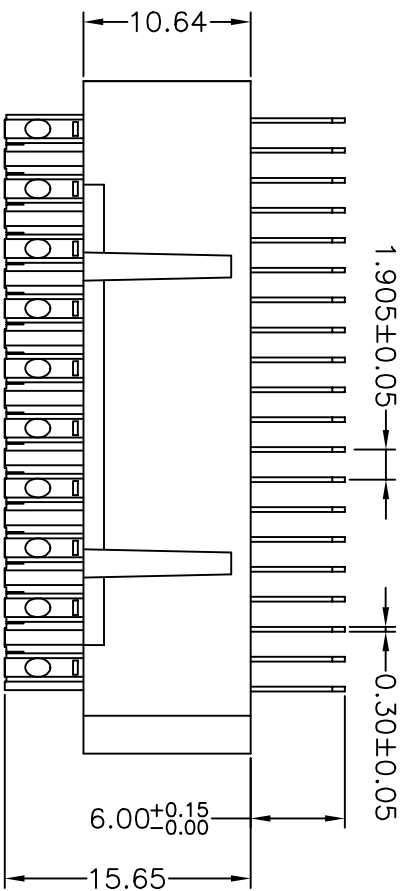

DIMENSIONS TOLERANCE		單位 (UNITS)		mm	
METRIC		數量 (QTY)	N/A	材料 (MTR'L)	SEE NOTE
0 = ±.30		處理 (FINISH)	SEE NOTE	繪圖 (DRAW)	
.00 = ±.20		設計 (DE'N)		審核 (CHK'K)	
.0000 = ±.XXX		核准 (APP'D)		圖名 (NAME)	成型PIN鍍錫 (YZ)
ANG = ±2°				料號 (PART NUMBER)	ASC+0200-40B1
				圖號 (DRAW NUMBER)	RASC020040B1
				圖檔 (FILE NAME .DWG)	E:GCT/A/SC/02
		比例 (SCALE)	1/1	圖紙 (SHEET)	A4
		頁次 (SHEET)	1	版本 (REV.)	A