

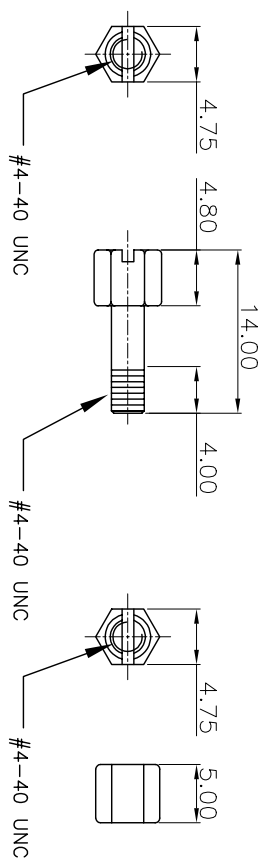
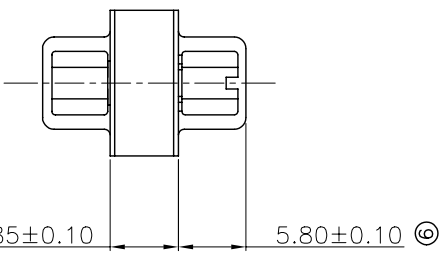
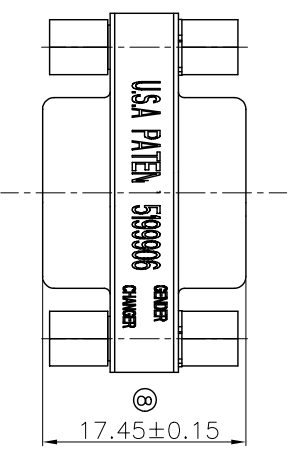


REV	MODIFICATION	DATE	DRAW	APPROVE
A	NEW DWG	2007.08.05	HUANG	KEVIN


NOTES  
 MARK ⑩ IS MAJOR TEST DIMENSION  
 1: MATERIAL:  
 HOUSING: P BT+30%G.F, BLOVE, UL94V-0  
 CONTACT: BRASS  
 2: FINISH:  
 CONTACT PLATING: GOLD PLATED  
 3: SPECIFICATION:  
 CURRENT RATING: 5A  
 WITHSTANDING VOLTAGE: AC 1000V 5s  
 INSULATION RESISTANCE: 1000M Ω 500V DC  
 OPERATING TEMPERATURE: -55°C~105°C

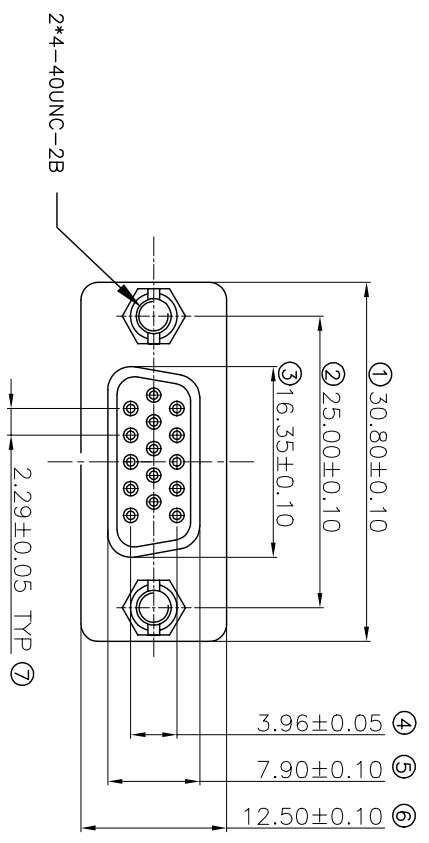

Screw specification

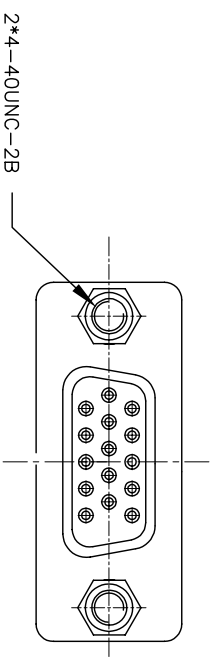

-TOLERANCES-  
 UNLESS OTHERWISE SPECIFIED  
 公差參考表



TITLE:  
 產品名稱: DB 0.76 FEMALE轉接頭

X.X	±0.25	X.X°	±3°	APPD: 核准:	KEVIN	PRODUCT NO: 產品編號:	183-XXXXFBXPB01
X.XX	±0.15	X.XX°	±1°	CHECK: 校對:	TENA	DATE	SCALE UNIT TYPE PAGE
X.XXX	±0.05	X.XXX°	±0.5°	DRAW: 繪圖:	HUANG	2007.08.05	FREE MM H 1/1