
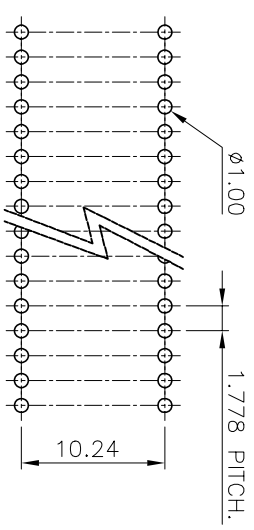

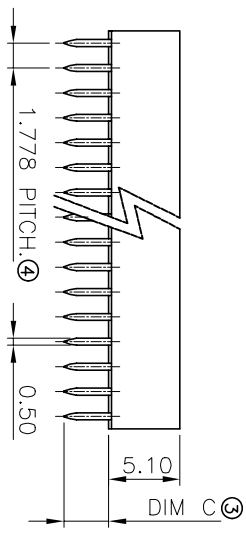


REV	MODIFICATION	DATE	DRAW	APPROVE
A	EN0704016	16-APR-07	YUKI	KEVIN

NOTES
 MARK ① IS MAJOR TEST DIMENSION

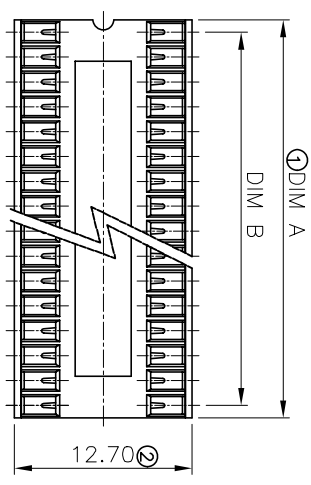

1:MATERIAL: PBT+30%G.F, BLACK, UL94V-0
 CONTACT: BRASS/PHOSPHOR BRONZE
 2:FINISH:
 CONTACT PLATING: TIN PLATED 80u"~120u"
 3:SPECIFICATION:
 CURRENT RATING: 1mA
 WITHSTANDING VOLTAGE: AC 1000V 5s
 INSULATION RESISTANCE: 1000MΩ 500V DC
 OPERATING TEMPERATURE: -55°C~105°C
 4:P/N: 10 3-XXX Z A T P K XX

01: 窄体无孔DIM C=3.2
 02: 窄体无孔DIM C=2.8
 03: 窄体有一孔DIM C=3.2
 04: 窄体有一孔DIM C=2.8
 05: 窄体有二孔DIM C=3.2
 06: 窄体有二孔DIM C=2.8
 07: 宽体无孔DIM C=3.2
 08: 宽体无孔DIM C=2.8
 09: 宽体有一孔DIM C=3.2
 10: 宽体有一孔DIM C=2.8
 11: 宽体有二孔DIM C=3.2
 12: 宽体有二孔DIM C=2.8
 A: PH1.778
 7: PH2.54
 T: CONTACT PLATING TIN
 K: PLASTIC COLOUR BLACK
 P: 冲制端子

產品名稱	產品料号	DIM A	DIM B
IC-28P	103-028ZATPKXX	24.89	23.12
IC-32P	103-032ZATPKXX	28.44	26.67
IC-36P	103-036ZATPKXX	32.00	30.23

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.08

-TOLERANCES-
 公差參考表

UNLESS OTHERWISE SPECIFIED		TITLE:	
X.X ±0.25	X.X° ±3°	產品名稱 :	IC1.778 W/O STICK
X.XX ±0.15	X.XX° ±1°	APPD:	KEVIN
X.XXX ±0.05	X.XXX° ±0.5°	核准:	
		CHECK:	TENA
		校對:	
		DRAW:	YUKI
		繪圖:	
		DATE	2007.04.16
		SCALE	UNIT
		FREE	MM
			H
			1/1

