

ROHS

REV	DESCRIPTION	MODIFICATION	DATE
A/0	新制定		05.06.14
A/1	變更一	物料編碼變更	06.05.06

*MATERIAL
 BODY : PA66+30% UL 94V-0 RATED, COLOR: WHITE
 CONTACTS : BRASS
 CONTACT PLATING : GOLD PLATING OVER NICKEL ON CONTACT
 AREA TIN PLATING ON TERMINAL



*MECHANICAL
 MATING FORCE : 4.5 KG MAX. @ 25 MM/MINUTE
 UNMATING FORCE: 1.0 KG MIN. AND 4.0 KG MAX. @ 25 MM/MINUTE
 DURABILITY: 100 MATING CYCLES

*ELECTRICAL SPECIFICATION
 INSULATION RESISTANCE : 1000 MEGOHMS MIN
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V DC RMS ±50 V, 60 HZ
 CURRENT RATING: 1.5 AMPERES MIN
 SHELL RESISTANCE: 50 MILLOHMS MAX. INITIAL: 50 MILLOHMS
 MAX.CHANGE FROM INITIAL
 CONTACT RESISTANCE : 20 MILLOHMS MAX.

*ENVIRONMENTAL
 OPERATING TEMPERATURE : -20° TO 85°
 *HOW TO ORDER

PART NUMBER :

DF 245 S 1-0 1 0 01 B4

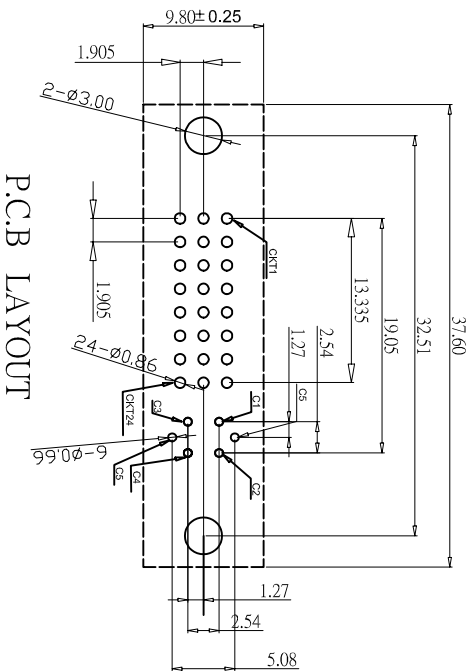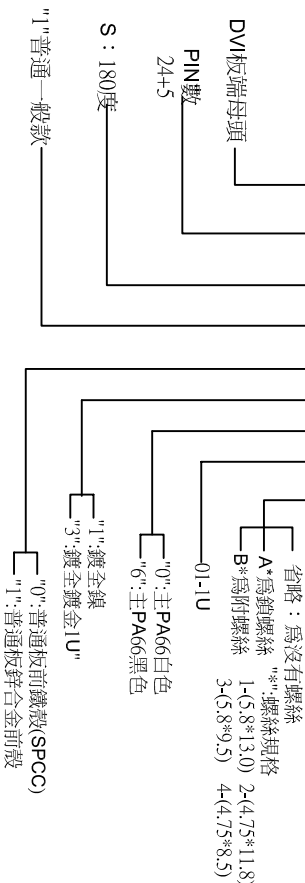

未標示公差尺寸值		DRAWN BY		FAN SHA	
METRIC .0=±0.35 .00=±0.25 .000=±0.15		CHECKED			
TITLE: DVI(24+5)F180度附4.75*8.50		APPROVED			
PRODUCT NO: DF245S1-01001B4		DRAW NO		COST-009	
FILE NO: ZK-3-D-001		UNIT		mm	
SCALE: 1:1 REV		A/0			