
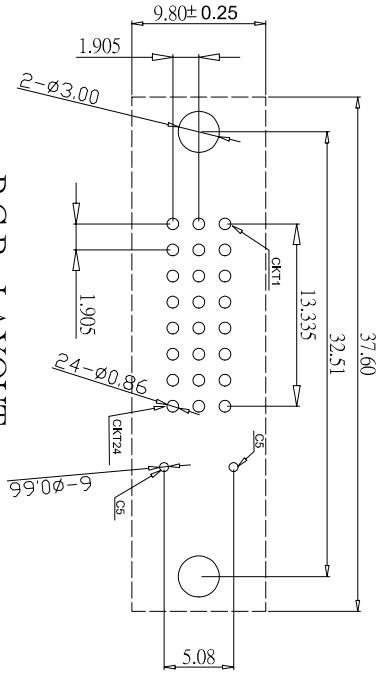

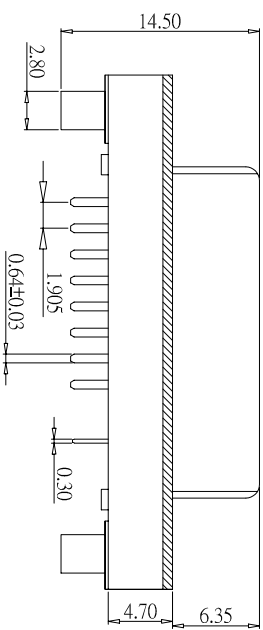
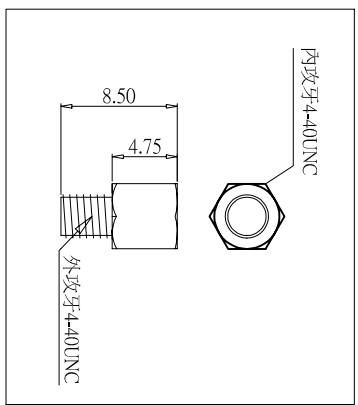


ROHS

REV	DESCRIPTION	MODIFICATION	DATE
A/0	新制定		05.06.14
A/1	變更一	物料編碼變更	06.05.06

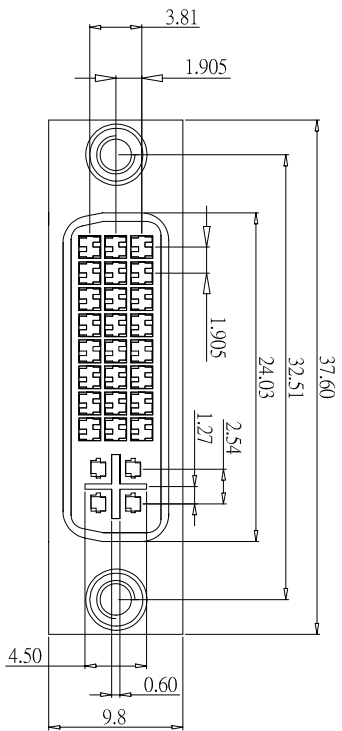

P.C.B LAYOUT

*MATERIAL
 BODY : PA66+30% UL 94V-0 RATED, COLOR: WHITE
 CONTACTS : BRASS
 CONTACT PLATING : GOLD PLATING OVER NICKEL ON CONTACT AREA TIN PLATING ON TERMINAL

*MECHANICAL
 MATING FORCE : 4.5 KG MAX. @ 25 MM/MINUTE
 UNMATING FORCE : 1.0 KG MIN. AND 4.0 KG MAX. @ 25 MM/MINUTE
 DURABILITY : 100 MATING CYCLES


*ELECTRICAL SPECIFICATION
 INSULATION RESISTANCE : 1000 MEGOHMS MIN
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V DC RMS ± 50 V.60 HZ
 CURRENT RATING : 1.5 AMPERES MIN
 SHELL RESISTANCE : 50 MILLIOHMS MAX. INITIAL: 50 MILLIOHMS
 MAX CHANGE FROM INITIAL
 CONTACT RESISTANCE : 20 MILLIOHMS MAX.

*ENVIRONMENTAL
 OPERATING TEMPERATURE : -20° TO 85°

*HOW TO ORDER

PART NUMBER :

DF 241 S 1-1 1 0 01 B4

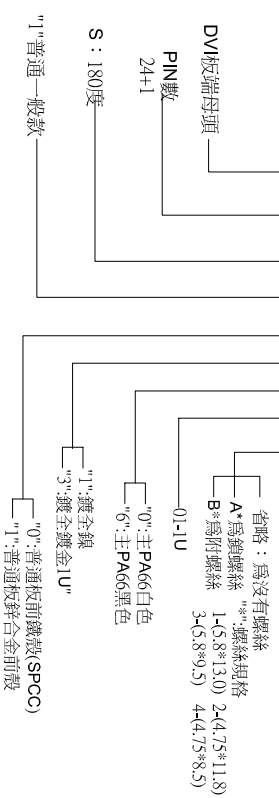

○		DRAWN BY		FAN SHA	
CHECKED		APPROVED			
TITLE:		DVI(24+1)F(180(鍍)度)附4.75*8.50		DRAW NO	
PRODUCT NO:		DF241S1-11001B4		COST-450	
FILE NO:		ZK-3-D-001		UNIT	
SCALE		1:1 REV		mm	
未標示公差尺寸值		METRIC		mm	
.0±0.35					
.00±0.25					
.000±0.15					