
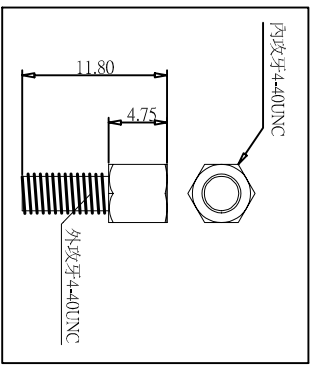


P.C.B LAYOUT



RoHS

REV	DESCRIPTION	MODIFICATION	DATE
A/0	新制定		06.06.03


**\*MATERIAL**  
 BODY : PBT30% UL 94V-0 RATED. COLOR: WHITE  
 LATCH : PA66+30% G.F 94V-0 RATED. COLOR: WHITE  
 CONTACTS : BRASS  
 CONTACT PLATING : GOLD PLATING OVER NICKEL ON CONTACT  
 AREA TIN PLATING ON TERMINAL

**\*MECHANICAL**  
 MATING FORCE : 4.5 KG MAX. @ 25 MM/MINUTE  
 UNMATING FORCE: 1.0 KG MIN. AND 4.0 KG MAX. @ 25 MM/MINUTE  
 DURABILITY: 100 MATING CYCLES

**\*ELECTRICAL SPECIFICATION**  
 INSULATION RESISTANCE : 1000 MEGOHMS MIN  
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V DC RMS ± 50 V.60 HZ  
 CURRENT RATING: 1.5 AMPERES MIN  
 SHELL RESISTANCE: 50 MIOHMS MAX./INITIAL; 50 MIOHMS  
 MAX.CHANGE FROM INITIAL  
 CONTACT RESISTANCE : 20 MILLOHMS MAX.

**\*ENVIRONMENTAL**  
 OPERATING TEMPERATURE : -20° TO 85°  
 \*HOW TO ORDER

PART NUMBER :

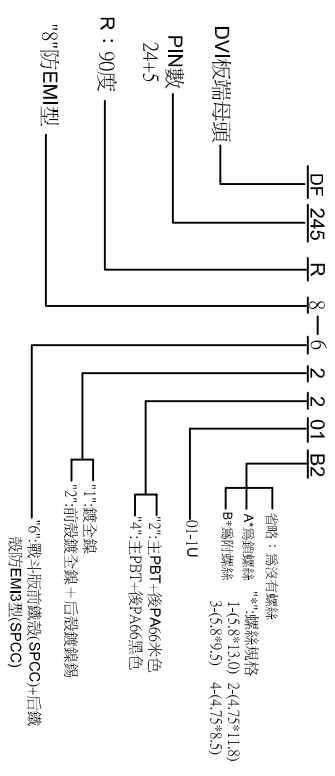

未標示公差尺寸值		TITLE:		DRAWN BY		聶玉忠	
METRIC		DVI(24+5)8F90度防螺絲(防EMI4型)		DESIGNED BY			
.0=±0.35		PRODUCT NO: DF245R8-62201B2		APPROVAL BY			
.00=±0.25		FILE NO: ZK-3-D-001		DRAW NO		COSI-424	
.000=±0.15		SCALE 1:1		UNIT mm			
		REV AVI					