

# 0.079" (2.00 mm) Pitch Wire to Board Connector

2004 Series

## TERMINAL

Part No:2004T










Applicable wires:AWG#24-30

Jacket Overall:  $\phi$  1.4mm MAX

Current rating:2A

Material:Bronze

Voltage rating:125V

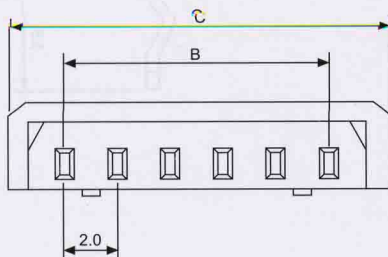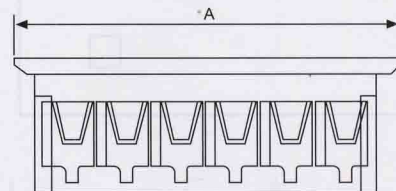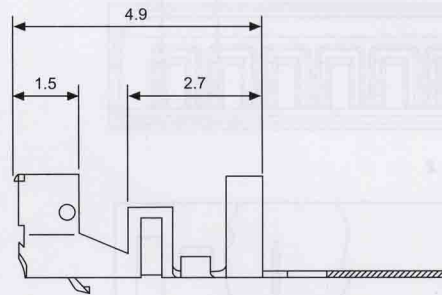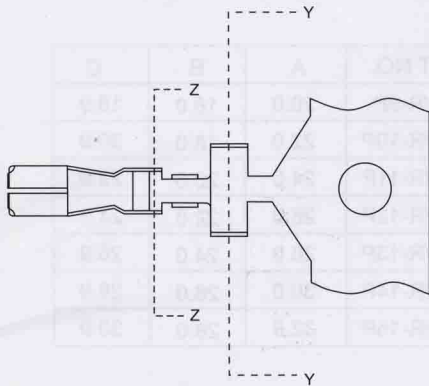

# 0.079" (2.00 mm) Pitch Wire to Board Connector

2004 Series

## SPECIFICATION

Poles: 2-15

Voltage rating: 125V

Current rating: 2A

Contact resistance: 20mΩ max

Withstand voltage: 500V AC/min.

Insulation resistance: 1000MΩ

MATERIAL:





Base: Nylon66, UL 94V-0

Post: Bronze


Temperature range: -20°C ~ +85°C

POLES	PART NO.	A	B	C
2	2004S/R-2P	6.0	2.0	4.9
3	2004S/R-3P	8.0	4.0	6.9
4	2004S/R-4P	10.0	6.0	8.9
5	2004S/R-5P	12.0	8.0	10.9
6	2004S/R-6P	14.0	10.0	12.9
7	2004S/R-7P	16.0	12.0	14.9
8	2004S/R-8P	18.0	14.0	16.9

POLES	PART NO.	A	B	C
9	2004S/R-9P	20.0	16.0	18.9
10	2004S/R-10P	22.0	18.0	20.9
11	2004S/R-11P	24.0	20.0	22.9
12	2004S/R-12P	26.0	22.0	24.9
13	2004S/R-13P	28.0	24.0	26.9
14	2004S/R-14P	30.0	26.0	28.9
15	2004S/R-15P	32.0	28.0	30.9

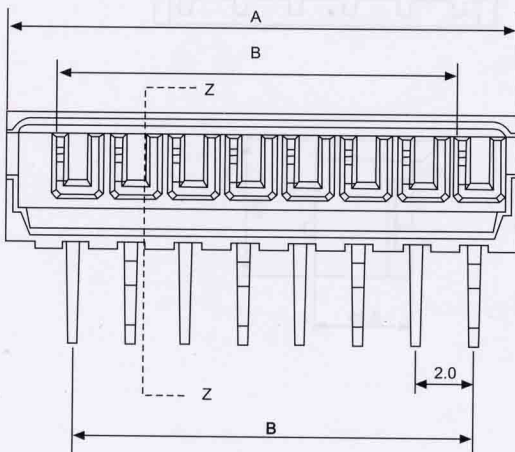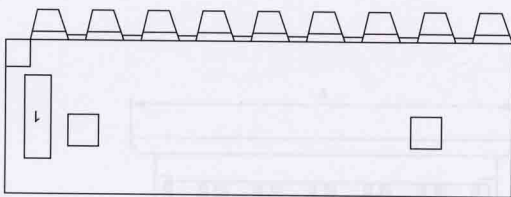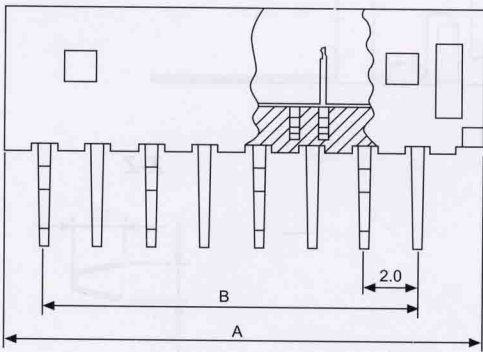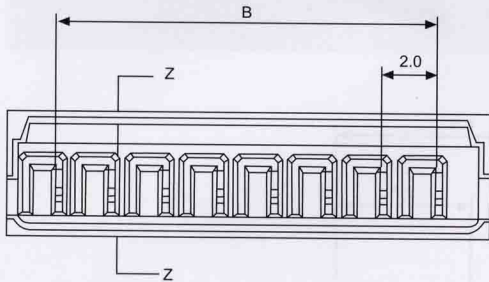

Z-Z

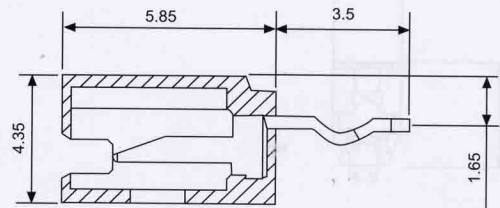

Z-Z

