


0.150" (3.81 mm) Pitch Disconnectable Connectors for Medium-Currency Application


3810/3811 Series

SPECIFICATION

Poles: 2-14
 Voltage rating: AC, DC 250V
 Current rating: AC, DC, 7A
 Withstand voltage: 1500V AC/min.
 Insulation resistance: 1000M Ω /min.
 Temperature range: -25°C ~ +85°C
 Applicable PC board thickness: 0.063" (1.6mm)
 Contact resistance: Initial value/10m Ω max.
 After environmental testing/20m Ω max.

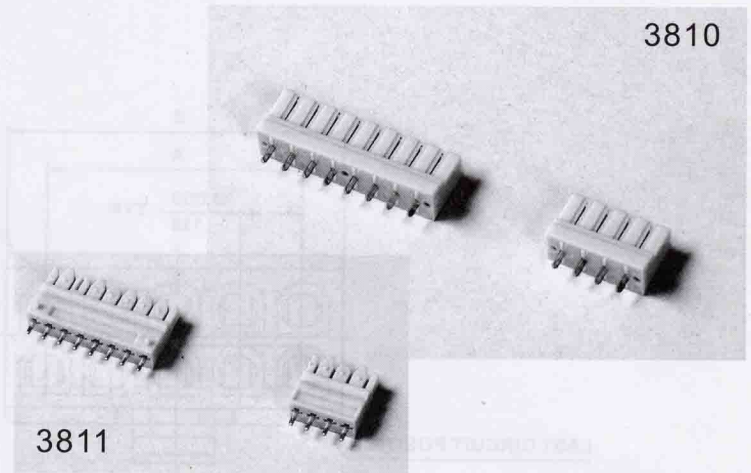

TERMINAL 3810

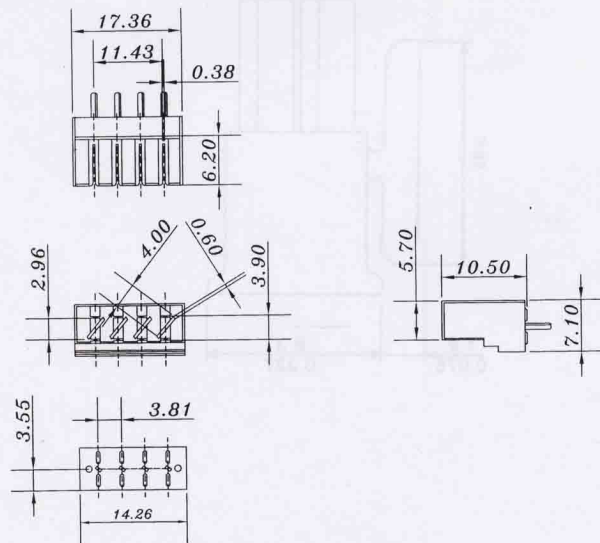

TERMINAL 3811

